

Ultra-Low Tension Transducer



FEATURES

- Capacity range: 1.3, 2.2, 4.4, and 6.6 lb (600g, 1, 2, and 3 kg)
- Precision accuracy - repeatability better than 0.02% rated output
- Compact size with high overload capability
- Easily adapts to customer supplied rods, shafts, or pulleys
- Measure low resultant tension forces with small wrap angles
- Single bolt installation
- Wide range of operating tensions
- Factory calibration eliminates need for on-site test weights

DESCRIPTION

Cantilever mounted, narrow web LTN transducers are designed to measure single strand or narrow web tensions in any moving web material that requires ultra-low force measurement with high accuracy. The filament and fiber transducer offers excellent sensitivity in working ranges of less than 150 grams and permits accurate resolution at the milligram level. Accuracy and long-term reliability are assured through the LTN beam design along with the installation of bonded foil strain gages connected into a full Wheatstone bridge. All units are designed to survive overloads of 300% rated capacity without sustaining damage, and are temperature compensated and calibrated to permit on-site push-button calibration.

LTN transducers are not limited by difficult applications. Repeatable tension signals are produced regardless of wrap angle and range of operating tension.


LTN design accommodates customer supplied sheaves or rods required for fiber optic/wire/ cable or filament applications.

Vishay BLH DXt-40 Web Tension Transmitters measure and display tension data from multiple LTN transducers. Along with measurement, these units provide four analog control signal outputs and a digital RS-485, Allen-Bradley Remote I/O Interface.

APPLICATIONS

- Low capacity paper, film, and foil equipment
- Thread, cable, and filament production
- Winder, rewinder, laminating, and coating zones

CONFIGURATION

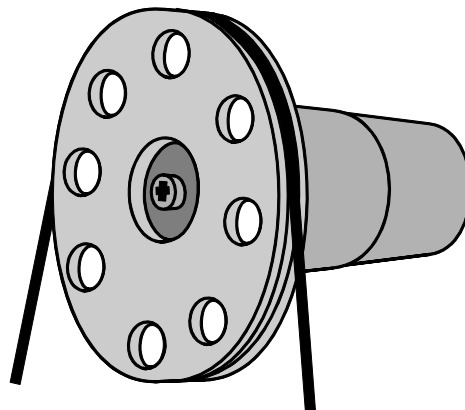

Model LTN

Vishay BLH

Ultra-Low Tension Transducer



SPECIFICATIONS

Performance

Capacity	1.3, 2.2, 4.4, and 6.6 pounds* (600g, 1, 2, and 3 kilograms)
Rated Output (R.O.)	1.0 mV/V nominal
Nonlinearity	0.02% R.O.
Hysteresis	0.02% R.O.
Repeatability	0.02% R.O.
Creep (20 minutes)	0.02% R.O..

Electrical

Recommended Excitation	10 Vac/dc
Maximum Excitation	15 Vac/dc
Input Resistance	420 ohms nominal
Output Resistance	350 ohms +/-5 ohms
Insulation Resistance	2 G-ohms
9 Pin 'D' Connector	see outline dimensions

Temperature

Safe/Storage Range	14 to 122°F (-10 to 50°C)
Compensated Range	14 to 122°F (-10 to 50°C)
Temperature Effects:	
Zero Balance	0.0023% R.O./°F (0.004%/°C)
Output	0.0007% Load/°F (0.0012%/°C)

Materials

Beam Housing	aluminum
Mounting Bolt	1/2-20 UNF-2 grade 3 min (not supplied by BLH)

Mechanical


Unit Weight	13 ounces
Deflection	0.008 inch (0.2 mm)

Overload Ratings: (% Rated Capacity)

Safe Load	300%
Ultimate Load	500%
Safe Side Load	300%
Ultimate Side Load	500%

*includes housing load end dead weight of 0.30 lb

DIMENSIONS

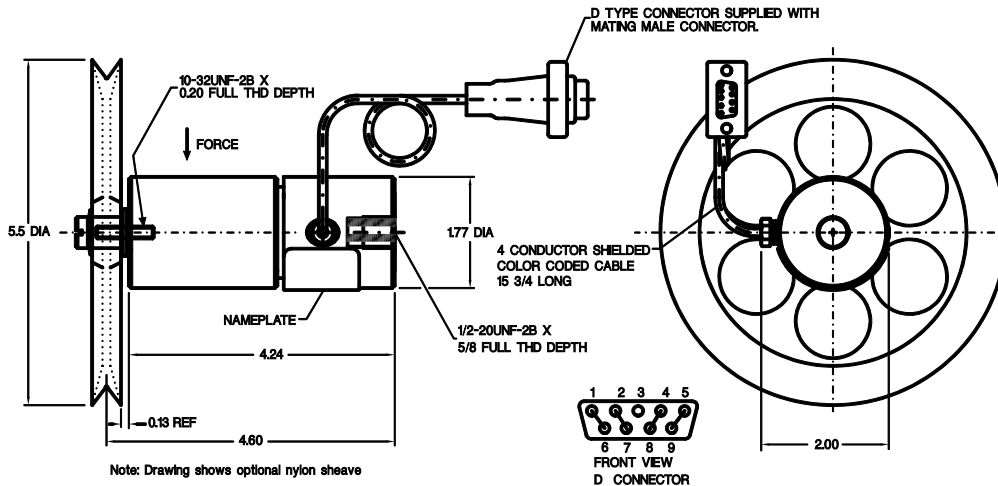

TENSION UNIT CONVERSIONS	
METRIC	ENGLISH
600 GM	1.3 LB
1 KG	2.2 LB
2 KG	4.4 LB
3 KG	6.6 LB

SIGNAL	FLYING LEADS	9-PIN D-CONN.
INPUT +	RED	1 & 6
OUTPUT +	GREEN	2 & 7
SHIELD	—	3
OUTPUT -	BLUE	4 & 8
INPUT -	WHITE	5 & 9

Vishay BLH is continually seeking to improve product quality and performance. Specifications may change accordingly.

VISHAY TRANSDUCERS (VT) SALES OFFICES

**VT Americas
System Products
Norwood, MA**
PH: +1-781-298-2200
FAX: +1-781-762-3988
vts.us@vishaymg.com

**VT Canada
Toronto**
PH: +1-416-251-2554
FAX: +1-416-251-2690
vt.can@vishaymg.com

**VMG UK
Basingstoke**
PH: +44-125-646-2131
FAX: +44-125-647-1441
vt.uk@vishaymg.com

**VT Sweden
Karlskoga**
PH: +46-586-630-00
FAX: +46-586-630-99
vt.se@vishaymg.com

**VMG Germany
Heilbronn**
PH: +49-7131-3901-260
FAX: +49-7131-3901-2666
vt.de@vishaymg.com

**VMG France
Chartres**
PH: +33-2-37-33-31-20
FAX: +33-2-37-33-31-29
vt.fr@vishaymg.com

**VT Norway
System Products
Oslo**
PH: +47-22-884090
FAX: +47-22-884099
vt.no@vishaymg.com

**VT Finland
System Products
Jorvas**
PH: +358-9-8194-220
FAX: +358-9-8194-2211
vt.fi@vishaymg.com

**VMG Israel
Netanya**
PH: +972-9-863-8888
FAX: +972-9-863-8800
vt.il@vishaymg.com

**VT China
Tianjin**
PH: +86-22-2835-3503
FAX: +86-22-2835-7261
vt.prc@vishaymg.com

**VT Taiwan*
Taipei**
PH: +886-2-2696-0168
FAX: +886-2-2696-4965
vt.roc@vishaymg.com
*Asia except China