

Low Tension Transducer



FEATURES

- Capacities from 20 to 500 pounds
- Single bolt mounting with visual alignment marks for direct measurement of resultant force
- Repeatability better than 0.02% rated output
- Wide range of operating tensions (rangeability)
- Minimal deflection allows high operating speeds
- Factory calibrated for minimum start-up time and maintenance-free operation
- Stainless steel construction with high overload capability

DESCRIPTION

LTT technology combines precision strain gage force transducers with dead shaft mounting options to produce the highest accuracy web tension measurement systems available. LTT series transducers, developed for low force web tension applications, incorporate a differential bending beam design with a full Wheatstone Bridge strain gage configuration. This design provides stable, accurate, and repeatable measurement over a wide range of operating tensions while virtually eliminating temperature drift.

All LTT capacities are equipped with mechanical overload protection.



Available with a mounting configuration for dead shaft applications (with horizontal or vertical support surfaces), the LTT can be rotated to measure the resultant tension force, not just a component of the force.

Factory calibration, with closely matched output signals, eliminates field calibration and costly recalibration after the initial setup. Zero and span settings remain stable for tension forces at the low end of wide rangeability applications. The full bridge design (as opposed to half bridge) provides moderate accuracy when using a single transducer on one end of the roll.

APPLICATIONS

- Converting equipment
- Winders/Unwinders
- Coaters
- Laminators
- Printing presses

CONFIGURATION

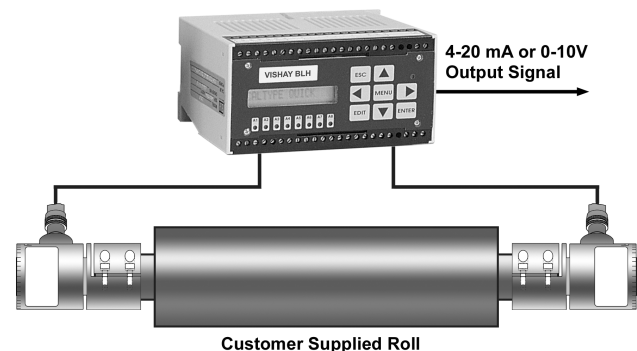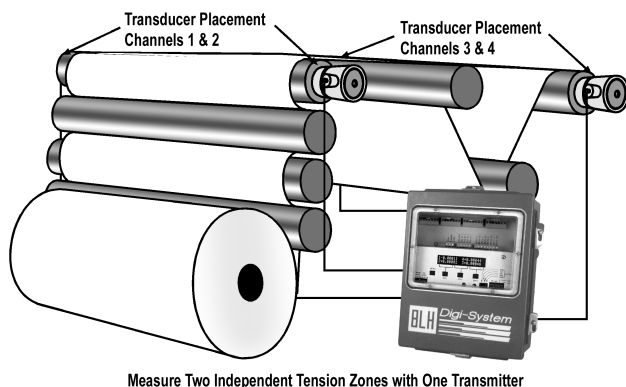

SPECIFICATIONS

Performance (% Rated Output)

Rated Capacity	20, 50, 100, 200, 500 lb
Rated Output (RO), Nominal	2.000 mV/V ±0.25%
Repeatability	0.02% RO
Maximum Combined Error	0.05% RO
Zero Balance	5.0% RO
Creep (20 Minutes)	0.03% RO
Temperature Effects:	
Effect on Zero Balance	0.002% RO/°F (0.0036% RO/°C)
Effect on Rated Output	0.002% of reading/°F (0.0036% of reading/°C)

Temperature

Operating Range	-40 to 220°F (-40 -105°C)
Compensated Range	+30 to 130°F (-1 -54°C)

Overload Rating

Safe Load	200% rated capacity
Safe Side Load	100% rated capacity
Ultimate Load	300% (or better) rated capacity

Materials

All Load Cell Parts	stainless steel
Bendix Connector	cadmium plated aluminum

Electrical

Input Resistance	350 ohms ±3 ohms
Output Resistance	350 ohms ±3 ohms
Recommended Excitation	10 Vac/dc
Maximum Excitation	15 Vac/dc

Deflection at Rated Capacity


LTT - 20 lb	0.0055 in.	LTT - 200 lb	0.0210 in.
LTT - 50 lb	0.0045 in.	LTT - 500 lb	0.0148 in.
LTT - 100 lb	0.0035 in.		

Approvals

FM (Factory Mutual)	3611 (Class I, II, 111; Div.1,2; Groups A-G)
CSA	C22.2 (Class I, 11,111; Div.1,2; Groups A-G)

Note: Transducer axis misalignment ±3° max
 Note: Environmental sealing optionally available; may affect measured accuracy by 1 ounce or less
 Note: Install Intrinsically safe systems with Drawing # 468872-1

OUTLINE DIMENSIONS - LTT WITH DEAD SHAFT ADAPTER

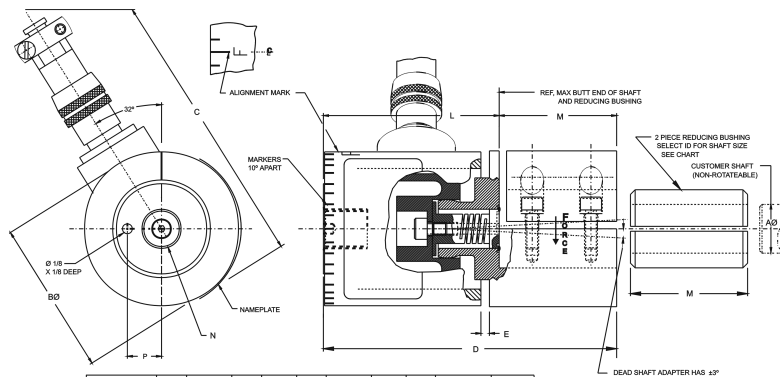

PART NAME	CAP (lbs)	A SHAFT (NOM)	BØ	C	D (MAX)	E	L (REF)	M	N	P
LTT 20	20	5/8							1/2-20UNF -2B	.438
LTT 50	50	3/4	1.97	4 3/8	3.75	.11	2.25	1.50	X 9/16 DEEP	
LTT 100	100	7/8								
LTT 200	200	1							5/8-18UNF -2B	.750
LTT 500	500	1 1/2	3.47	5 29/32	5.68	.16	3.68	2.00	X 1 1/16 DEEP	

CONNECTOR COLOR CODE

EXCITATION	GREEN (+) C
	BLACK (-) B
OUTPUT	WHITE (+) D
	RED (-) A

VISHAY TRANSDUCERS (VT) SALES OFFICES

VT Americas System Products
Norwood, MA
 PH: +1-781-298-2200
 FAX: +1-781-762-3988
 vts.us@vishaymg.com

VT Canada Toronto
 PH: +1-416-251-2554
 FAX: +1-416-251-2690
 vt.can@vishaymg.com

VMG UK Basingstoke
 PH: +44-125-646-2131
 FAX: +44-125-647-1441
 vt.uk@vishaymg.com

VT Sweden Karlskoga
 PH: +46-586-630-00
 FAX: +46-586-630-99
 vt.se@vishaymg.com

VMG Germany Heilbronn
 PH: +49-7131-3901-260
 FAX: +49-7131-3901-2666
 vt.de@vishaymg.com

VMG France Chartres
 PH: +33-2-37-33-31-20
 FAX: +33-2-37-33-31-29
 vt.fr@vishaymg.com

VT Norway System Products
Oslo
 PH: +34-91-7218890
 FAX: +34-91-7219056
 vt.es@vishaymg.com

VT Finland System Products
Jorvas
 PH: +358-9-8194-220
 FAX: +358-9-8194-2211
 vt.fi@vishaymg.com

VMG Israel Netanya
 PH: +972-9-863-8888
 FAX: +972-9-863-8800
 vt.il@vishaymg.com

VT China Tianjin
 PH: +86-22-2835-3503
 FAX: +86-22-2835-7261
 vt.prc@vishaymg.com

VT Taiwan* Taipei
 PH: +886-2-2696-0168
 FAX: +886-2-2696-4965
 vt.roc@vishaymg.com
 *Asia except China