

## Multi-Zone Web Tension Transmitter



### FEATURES

- Individually digitized transducer forces for 4 web tension zones
- View left, right, and total tension values
- 100% digital calibration - no dead weight loading, no strapping
- On-Line diagnostics significantly reduce downtime
- Dynamic Digital Filtering for each tension zone
- Measure resultant force ( $F_r$ ) and angle of inclination for any or all wrap angles (HTU version only)

### OPTIONAL FEATURES

- Total, individual, and difference output control signals - four 4-20 mA outputs
- 4 input/output dry contact relays
- Viewing window for internal vacuum fluorescent display
- Allen-Bradley Remote I/O or Modbus RTU interface

### DESCRIPTION

DXt-40 Tension Transmitters measure up to four independent web points, or zones, to ensure maximum operating speeds without belt, felt, or product breakage. Each zone is precisely measured with 750,000 count resolution and produces a corresponding, high resolution, 4-20 mA output. Total, individual, and differential outputs from two transducers (load cells) permit a comparison of tension signals on either side of a sheet, strip, or web.

Digital calibration eliminates time consuming dead weight loading and machine 'strapping'.



With four integral operating modes, DXt-40 transmitters offer wide operating flexibility and easy installation. Simply select the mode that matches your application, enter the transducer zero and span values, and begin system operation.

When combined with unique HTU transducers, units measure both horizontal and vertical tension vectors. Based upon both measurements, software algorithms calculate the precise, resultant force vector and exact linear tension component.

### APPLICATIONS

- Pulp and paper machinery
- Roofing machines
- Converting equipment
- Mining conveyors
- Winders, rewinders, laminators, coaters, dryers, felts

### CONFIGURATION

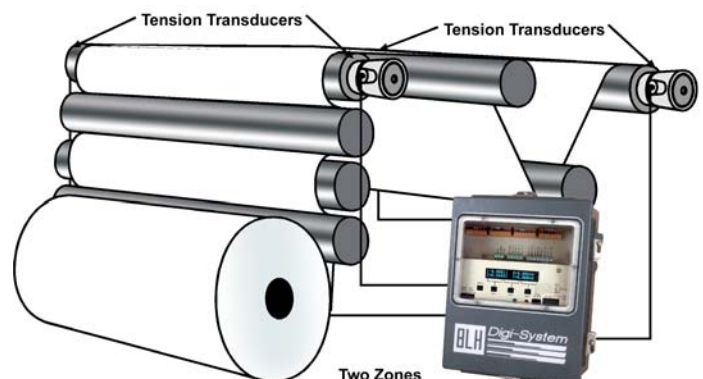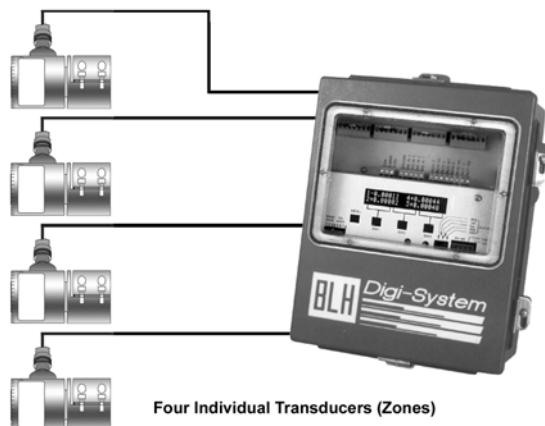



## SPECIFICATIONS

### PERFORMANCE

Internal Resolution	4,194,304 total counts
Max. Display Resolution	3,000,000 total counts
Max. Res. Per Channel	750,000 counts
Conversion Speed	100 msec (10 updates/sec)
Full Scale Range	±35 mV/channel
Bipolar Dead Load Range	±100% (positive/negative signal)
Linearity	±0.0015% of full scale
Load Cell Excitation	10 V (65 mA/channel max)
Software Filter (Std.)	50 to 10,000 msec
Optional Auto-Tune Filter	multivariable up to 10,000 msec
Remote Sense	user configurable, each channel
Span/Zero	±2ppm/°C
Calibration Repeatability	0.6 microvolts per count
Step Response	one conversion cycle
Units	LB, KG, N, PLI, (all) and N/M or Web Width (HTU only)

### ENVIRONMENT

Operating Temperature	-10 to 55°C (12 to 131°F)
Storage Temperature	-20 to 85°C (-4 to 185°F)
Humidity	5 to 90% rh, non-condensing

### INTERNAL DISPLAY/OPERATOR INTERFACE

Standard VFD Display	high visibility, vacuum fluorescent 2 columns of 20 characters each
Interface	4 'soft buttons'

### ELECTRICAL

Voltage	117/230 Vac + 15% 50/60 Hz
Power	12 watts max
Input Impedance	10 M-Ohms, min. per channel
Noise	0.002% full scale (max +/-16 counts w/o filter)
Common Mode Rej.	100 db @ 60 Hz
Normal Mode Rej.	100 db above 35Hz
Parameter Storage	EEPROM

### ISOLATED ANALOG OUTPUT(S) - FOUR AVAILABLE

Type	16 bit digital to analog
Current	4-20 mA (600 Ohm max load)
Voltage	0-10 Vdc (25K Ohm min load)

### RELAY OUTPUTS (OPTIONAL)

Solid State	110/220 Vac at 1.0 amp
Closed Contact	28V ac/dc @ 0.4 amps (max.)

### DIGITAL INPUTS

Logic'0' (Low)	short circuit or less than 0.5Vdc, sink 3mA (min)
Logic'1' (High)	open circuit or 10 to 28 Vdc (TTL open collector)

### SIMPLEX DATA OUTPUT (STANDARD)

Type	RS-485 (Simplex)
Baud	1200 or 9600
Data Format (Selectable)	
ASCII	7 data bits, even parity, stop bit

### TERMINAL/COMPUTER INTERFACE (OPTIONAL)

Interface Type	RS-485 half duplex (standard)
Baud	1200 or 9600
Protocol	duplex command/response format
ASCII	7 data bits, even parity, stop bit

### SPECIAL PROTOCOLS (OPTIONAL)

Modbus	RTU Protocol
--------	--------------

### SPECIAL INTERFACE (OPTIONAL)

Allen Bradley	Remote I/O - 1/4 logical rack
---------------	-------------------------------

### ENCLOSURE

Dimensions	11.5x 8.0 x4.3 HWD NEMA 4/4X
Weight	12.0 pounds (NEMA 4/4X units)
Optional EX	12.875 x 10.875 x 8.188 HWD (Explosion Proof)

### APPROVALS

FM (Factory Mutual)	3611 (Class I, II, III; Div.1, 2; Groups A-G)
CSA	C22.2 (Class I, II, III; Div.1, 2; Groups A-G)

Vishay BLH is continually seeking to improve product quality and performance. Specifications may change without notification.

PLC and Allen-Bradley are trademarks of Allen-Bradley Co., Inc. Modbus is a trademark of Schneider Automation.

## VISHAY TRANSDUCER SYSTEMS (VTS) - VISHAY BLH - SALES OFFICES

### VTS Americas Canton, MA

Tel: +1-781-821-2000  
Fax: +1-781-828-1451  
vts.us@vishaymg.com

### VTS Canada Toronto

Tel: +1-416-251-2554  
Fax: +1-416-251-2690  
vts.can@vishaymg.com