


SERIES 55-200 ARMORED FLOWMETER

MAGNETIC INDICATOR OR 2-WIRE/4-WIRE ELECTRONIC TRANSMITTER

1/2" (13) FEMALE NPT ELECTRICAL CONNECTION FOR ELECTRONIC TRANSMITTER (USE SUITABLE FLEXIBLE CONDUIT)

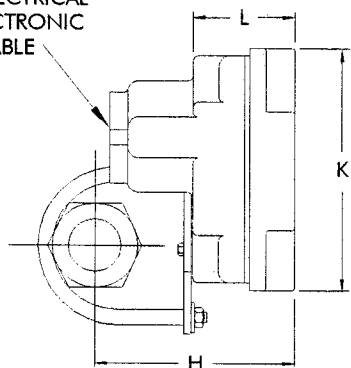


TOP VIEW


MAGNETIC INDICATOR OR
2-WIRE / 4-WIRE ELECTRONIC
TRANSMITTER NEMA 4▲

▲ INTEGRAL FLOW ALARM

(N) END FITTING

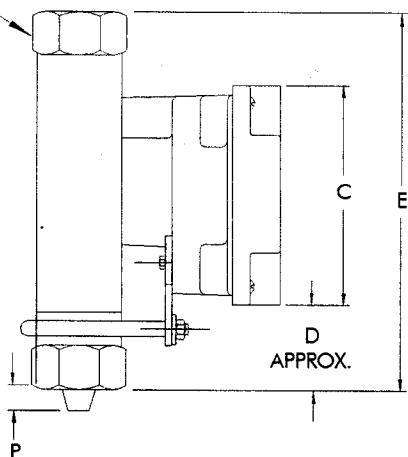

SIDE VIEW

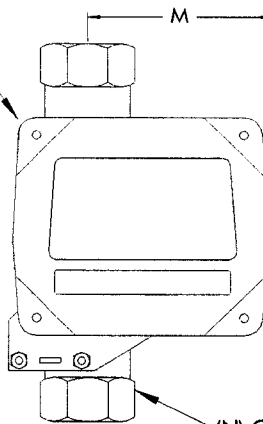

FRONT VIEW

▲ ACCESSORY ITEM FOR MAGNETIC INDICATOR AND/OR ELECTRONIC TRANSMITTER. FACTORY MUTUAL APPROVED INTRINSICALLY SAFE FOR CLASS I, DIV. I GROUPS A,B,C & D WHEN INSTALLED WITH APPROVED BARRIER.

▲ 2-WIRE OR 4-WIRE ELECTRONIC TRANSMITTER FACTORY MUTUAL APPROVED INTRINSICALLY SAFE FOR CLASS I, DIV. 1, GROUPS A, B, C, D WHEN INSTALLED WITH APPROVED BARRIER.

TUBE SIZE	C	D	E	H	K	L	M	N	P
1/2" (13)	5" (127)	1-13/16" (46)	7-1/2" (191)	4-9/16" (106)	5-7/8" (149)	2-1/4" (57)	3-3/4" (95)	1/2" NPT	---
1" (25)	5" (127)	2" (51)	8-15/16" (227)	4-1/2" (114)	5-7/8" (149)	2-1/4" (57)	4-5/16" (110)	1" NPT	5/16" (8)
1-1/2" (38)	5" (127)	2-3/4" (70)	11-5/8" (295)	5" (127)	5-7/8" (149)	2-1/4" (57)	4-9/16" (116)	1-1/2" NPT	1" (25)
2" (51)	5" (127)	3" (76)	12-7/8" (327)	5-7/16" (138)	5-7/8" (149)	2-1/4" (57)	5" (127)	2" NPT	1-3/8" (35)

USFilter

Wallace & Tiernan Products
1901 West Garden Road
Vineland, NJ 08360
856.507.9000 phone
856.507.4125 fax

<http://www.wallaceandtiernan.usfilter.com>

DIMENSIONS
CN551.006UA

REV. 10/99