


SERIES 55-200 ARMORED FLOWMETER

MAGNETIC INDICATOR OR 2-WIRE/4-WIRE ELECTRONIC


TRANSMITTER WITH HAZARDOUS LOCATION FLOW SWITCH

1/2" (13) FEMALE NPT ELECTRICAL CONNECTION FOR ELECTRONIC TRANSMITTER (USE SUITABLE FLEXIBLE CONDUIT)

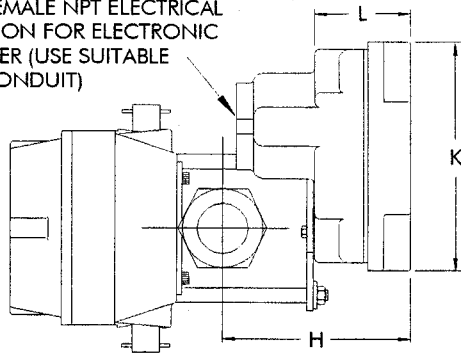

TOP VIEW


FLOW SWITCH - UL LISTED CLASS I, DIV. GROUP C & D OR CLASS II, DIV. 1 & 2 GROUPS E, F & G HAZARDOUS LOCATION

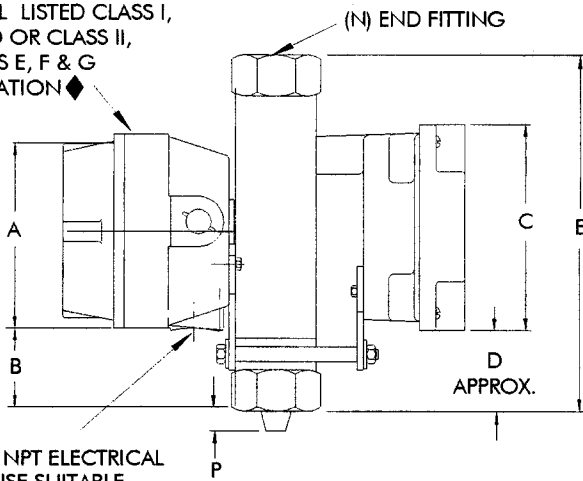

SIDE VIEW

MAGNETIC INDICATOR OR 2 WIRE / 4 WIRE ELECTRONIC TRANSMITTER NEMA 4 ▲

A INTEGRAL FLOW ALARM

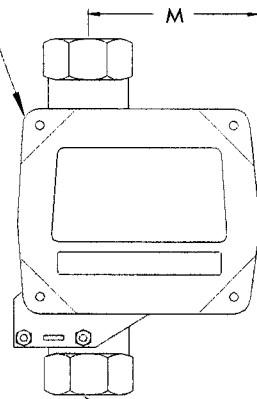

FRONT VIEW

(N) ORIFICE FITTING

3/4" (19) FEMALE NPT ELECTRICAL CONNECTION (USE SUITABLE FLEXIBLE CONDUIT FOR HAZARDOUS LOCATION)

TUBE SIZE	A	B	C	D	F	G	H	J	K	L	M	N	P
1/2" (13)	5" (127)	1-1/2" (38)	5" (127)	1-13/16" (46)	5-5/8" (142)	5-3/16" (132)	4-3/16" (106)	7-1/2" (191)	5-7/8" (149)	2-1/4" (57)	3-3/4" (95)	1/2" NPT	---
1" (25)	5" (127)	1-11/16" (43)	5" (127)	2" (51)	5-5/8" (142)	5-1/2" (140)	4-1/2" (114)	8-15/16" (227)	5-7/8" (149)	2-1/4" (57)	4-5/16" (110)	1" NPT	5/16" (8)
1-1/2" (38)	5" (127)	2-1/2" (64)	5" (127)	2-3/4" (70)	5-5/8" (142)	6" (152)	5" (127)	11-5/8" (295)	5-7/8" (149)	2-1/4" (57)	4-9/16" (116)	1-1/8" NPT	1" (25)
2" (51)	5" (127)	2-1/2" (64)	5" (127)	3" (76)	5-5/8" (142)	6-7/16" (164)	5-7/16" (138)	12-7/8" (327)	5-7/8" (149)	2-1/4" (57)	5" (127)	2" NPT	1-3/8" (35)

USFilter

Wallace & Tiernan Products
1901 West Garden Road
Vineland, NJ 08360
856.507.9000 phone
856.507.4125 fax

◆ AS DEFINED BY NEC

▲ 2 WIRE OR 4 WIRE ELECTRONIC TRANSMITTER FACTORY MUTUAL APPROVED INTRINSICALLY SAFE FOR CLASS I, DIV. 1, GROUPS A,B,C,D WHEN INSTALLED WITH APPROVED BARRIER.

A ACCESSORY ITEM FOR MAGNETIC INDICATOR AND/OR ELECTRONIC TRANSMITTER. FACTORY MUTUAL APPROVED INTRINSICALLY SAFE FOR CLASS I, DIV. 1 GROUPS A,B,C & D WHEN INSTALLED WITH APPROVED BARRIER.

<http://www.wallaceandtiernan.usfilter.com>

DIMENSIONS
CN551.010UA

REV. 10/99