


Chemiquip Catalog — SUPER-HIGH-PRESSURE TYPE

When ordering, please specify both desired Housing AND Snubbing Element Catalog numbers from charts


HOUSING CATALOG NUMBERS (30,000 psi)



Catalog Number	Tubing Connection (AMINCO) "A"	Pipe Connection "B"	Housing	Net Weight	Length
30-31-HF-4B-GS	1/4"	1/4" NPT	Type 316 Stainless Steel	1 1/2 lbs.	4 3/16"
30-31-HF-4-GS	1/4"	1/4" TUBE AMINCO			4 3/16"
30-31-HF-6B-GS	3/8"	1/4" NPT			4 3/16"
30-31-HF-6-GS	3/8"	3/8" TUBE AMINCO			4 3/16"
30-31-HF-4D-GS	1/4"	1/2" NPT			4 9/16"
30-31-HF-6D-GS	3/8"	1/2" NPT			4 9/16"
30-31-HF-4J-GS	1/4"	1/2" NPS			4 9/16"
30-31-HF-6J-GS	3/8"	1/2" NPS	4 9/16"		
HP-50	Snubber Element Only (Specify Porosity when Ordering)		Type 303 Stainless Steel	3 oz.	1 1/4"


ALL Chemiquip Snubbers are delivered with NPT Male threads pre-wrapped with TEPTape™, thread sealant.

HOUSING CATALOG NUMBERS (60,000 psi)



Catalog Number	Tubing Connection (AMINCO) "A"	Pipe Connection "B"	Housing	Net Weight	Length
60-31-HF-4B-GS	1/4"	1/4" NPT	Type 316 Stainless Steel	3 3/4 lbs.	5 1/2"
60-31-HF-4-GS	1/4"	1/4" TUBE AMINCO			5 1/2"
60-31-HF-6B-GS	3/8"	1/4" NPT			5 1/2"
60-31-HF-6-GS	3/8"	3/8" TUBE AMINCO			5 1/2"
60-31-HF-4D-GS	1/4"	1/2" NPT			6"
60-31-HF-6D-GS	3/8"	1/2" NPT			6"
60-31-HF-4J-GS	1/4"	1/2" NPS			6 1/2"
60-31-HF-6J-GS	3/8"	1/2" NPS	6 1/2"		
HP-50	Snubber Element Only (Specify Porosity when Ordering)		Type 303 Stainless Steel	3 oz.	1 1/4"

ALL Chemiquip Snubbers are delivered with NPT Male threads pre-wrapped with TEPTape™, thread sealant.

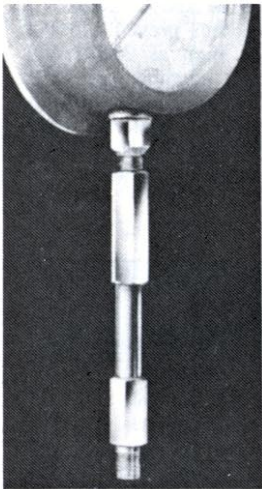

EXCESS FLOW CHECK SNUBBER

- prevents the escape of noxious, toxic or flammable liquids or gases in the event of instrument rupture
- completely isolates instrument from pressure acuating medium
- maximum working pressure—30,000 psi
- prevents transmission of surges or pulsations
- is designed not to plug, clog or fail
- has just one moving part which moves only a fraction of an inch, resulting in virtually no mechanical wear.

Cat. No.	Maximum Operating Pressure (psi)	Connection C	Housing	Net Weight	Length		
5-RMB	5,000	1/4" npt male	Type 316 Stainless Steel	1 1/2 lbs.	6"		
15-RMB	15,000	1/4" npt male			6"		
15-RMC	15,000	3/8" npt male			6"		
15-RMD	15,000	1/2" npt male			6"		
30-RHM 4	30,000	1/4" male high pressure tubing			6"		
30-RHM 6	30,000	3/8" male high pressure tubing			6"		
15-RAF 1	15,000	1/8" female taper seal tubing			6"		
15-RAF 2	15,000	1/8" female taper seal tubing			6"		
30-RHF 2	30,000	1/4" female high pressure tubing			6"		
30-RHF 4	30,000	1/4" female high pressure tubing			6"		
30-RHF 6	30,000	3/8" female high pressure tubing			6"		
30-RHF 9	30,000	3/8" female high pressure tubing			6"		
25PE	1/4" NPT Male Porosity E Snubber Element (for use with Excess Flow Check)				Stainless Steel	1 oz.	1 1/4"
RB-2	1/4" NPT x 1/2" NPT Reducing Bushing (for use with instruments having 1/4" NPT Male connection)				Stainless Steel	3 oz.	1"

