

# RATIO MONITOR / TOTALIZER

WITH HIGH / LOW ALARMS AND  
ANALOG OUTPUT



## Features

- Calculates ratio between flow A and B.
- Displays ratio, flowrate A and B and total A and B (resettable).
- 4 alarm values can be entered: low-low, low, high and high-high ratio alarm.
- Large 17mm (0.67") digits.
- Analog output acc. ratio, flowrate A or flowrate B.
- Very compact design for panel mount, wall mount or field mount applications.
- Operational temperature -30°C up to +80°C (-22°F up to 178°F).
- Rugged aluminum field mount enclosure IP67 / NEMA4X.
- Intrinsically safe  
⊕ II 1GD EEx ia IIB/IIC T4 T100°C.
- Explosion/flame proof ⊕ II 2G EEx d IIB T5.
- Full Modbus communication RS232/485/TTL.
- Loop or battery powered, 8 - 24V AC / DC or 115 - 230V AC power supply.
- Sensor supply 3.2 - 8.2 - 12 - 24V DC.

## Signal output

- (0)4 - 20mA / 0 - 10V DC according to the calculated ratio, flowrate A or flowrate B.
- Up to 3 free configurable alarm outputs.

## Signal input

### Flow

- Reed-switch.
- NAMUR.
- NPN/PNP pulse.
- Coil (sine wave).
- Active pulse signals.
- (0)4 - 20mA.
- 0 - 10V DC.

## Applications

- Two component applications like glueing, blending or mixing where continues ratio monitoring and/or totalising is important.



## General information

### Introduction

The flowcomputer Model F114 has been developed to calculate the actual ratio between two separate flows. Typical applications are found where locally a two component product is mixed, for example in construction works, roof or wall isolation, glueing and coating. The F114 offers the facility to set two low ratio and two high ratio alarm values. Special precautions are taken to allow start-up problems and incorrect ratio readings for a certain period of time. Based on the location of the flowmeters, a selection can be made out of six different formulas. A wide selection of options further enhance this models capabilities.

### Display

The display has large 17mm (0.67") and 8mm (0.31") digits which show the ratio, alarm values, flowrate A, total A and flowrate B, total B. On-screen engineering units are easily configured from a comprehensive selection. The ratio can be displayed as 1:\_\_\_ or as a percentage.

### Configuration

All configuration settings are accessed via a simple operator menu which can be pass-code protected. Each setting is clearly indicated with an alpha-numerical description, therefore avoiding confusing abbreviations and baffling codes. Once familiar with one F-series product, you will be able to program all models in the series without a manual. All settings are safely stored in EEPROM memory in the event of sudden power failure.

### Analog output signal

The calculated ratio, flowrate A or B can be re-transmitted with the (0)4 - 20mA or 0 - 10V DC output signal. The output signal is updated ten times per second. The output value is user defined in relation to the ratio or flowrate, e.g. 4mA equals to 1 : 50 and 20mA equals to 1 : 1. The output signal can be passive, active or isolated where the passive output type will loop power the F114.

### Alarm output

Up to three outputs are available to transmit the ratio alarm condition. All free configurable, in such a way that you can have e.g. one low-low alarm output, one low alarm output and one high alarm output. The output signals can be a passive

NPN, active PNP or an isolated electro-mechanical relay. Two outputs are available in Intrinsically Safe applications.

### Signal input

The F114 will accept most pulse and analog input signals for flow or mass flow measurement.

The input signal types can be selected by the user in the configuration menu without having to adjust any sensitive mechanical dip-switches or jumpers.

### Communication

All process data and settings can be read and modified manually or through the Modbus communication link (RS232 / RS485).

Full Modbus functionality remains available for the Intrinsically Safe version (TTL).


### Hazardous areas

For hazardous area applications, this model has been ATEX certified intrinsically safe  $\text{Ex II 1 GD EEx ia IIB / IIC T4 T100}^\circ\text{C}$  with an allowed operational temperature of  $-30^\circ\text{C}$  to  $+70^\circ\text{C}$  ( $-22^\circ\text{F}$  to  $+158^\circ\text{F}$ ). A flame proof enclosure is also available with the rating  $\text{Ex II 2 G EEx d IIB T5}$ .

### Enclosures

Various types of enclosures can be selected, all ATEX approved. As standard the F114 is supplied in an ABS panel mount enclosure, which can be converted to an ABS field mount enclosure. Most popular is our rugged aluminum field mount enclosure with IP67 / NEMA 4X rating. Both European or U.S. cable gland entry threads are available.

## Overview application F114

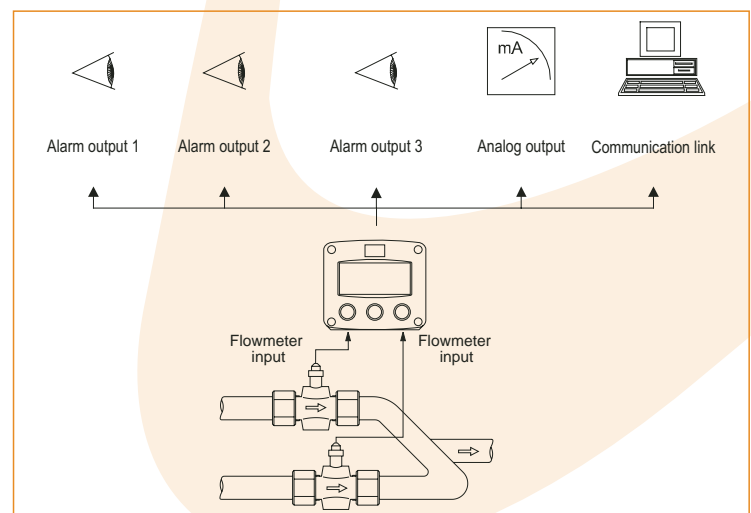


## Dimensions enclosures

### Enclosure HA

#### Aluminum field mount enclosure


IP67 / NEMA 4X  
Tapped holes: European thread

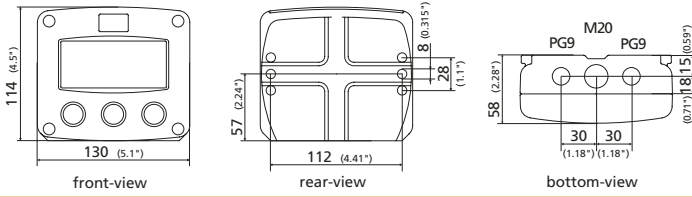

### Enclosure HB


#### Aluminum panel mount enclosure

IP65 / NEMA 4

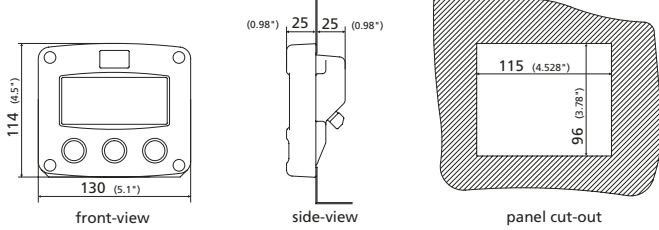

### ENCLOSURE HC (STANDARD) ABS PANEL MOUNT ENCLOSURE


IP65 / NEMA 4

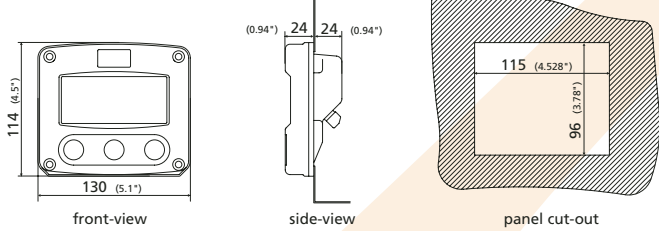

### Enclosure HD

#### ABS wall mount enclosure


IP67 / NEMA 4X  
Holes user defined

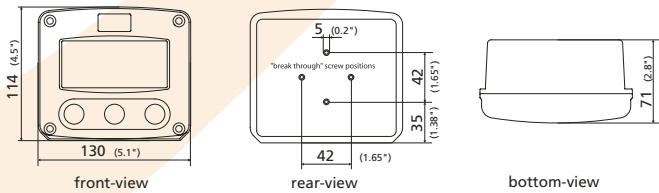


### Enclosure HU

#### Aluminum field mount enclosure

IP67 / NEMA 4X  
Tapped holes: U.S. thread


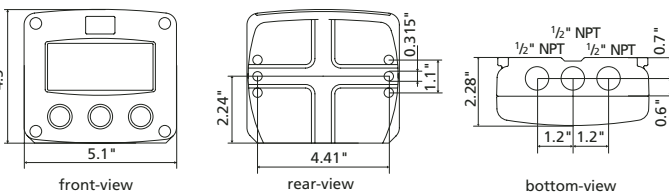


## Terminal connections

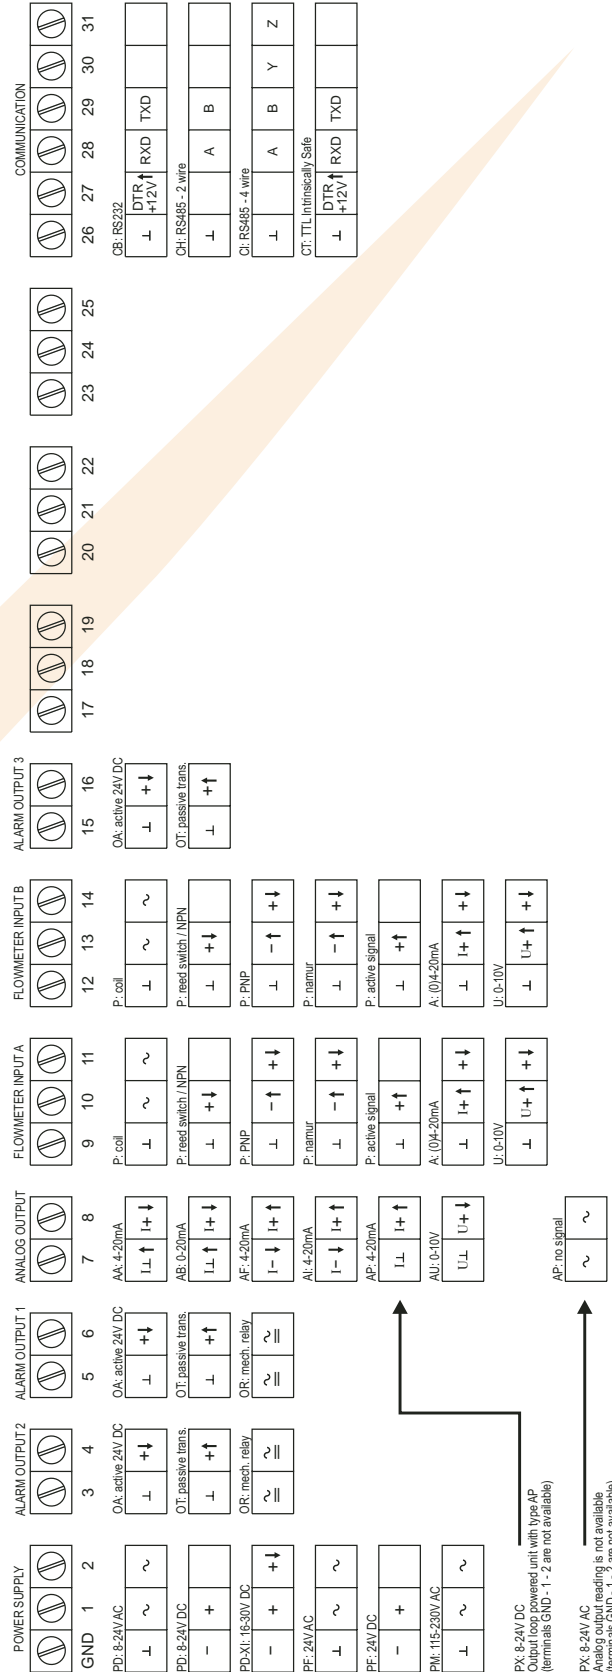


Typical wiring diagram F114-P-(AP)-CH-PB-(OT)

Typical wiring diagram F114-P-AP-CH-OT

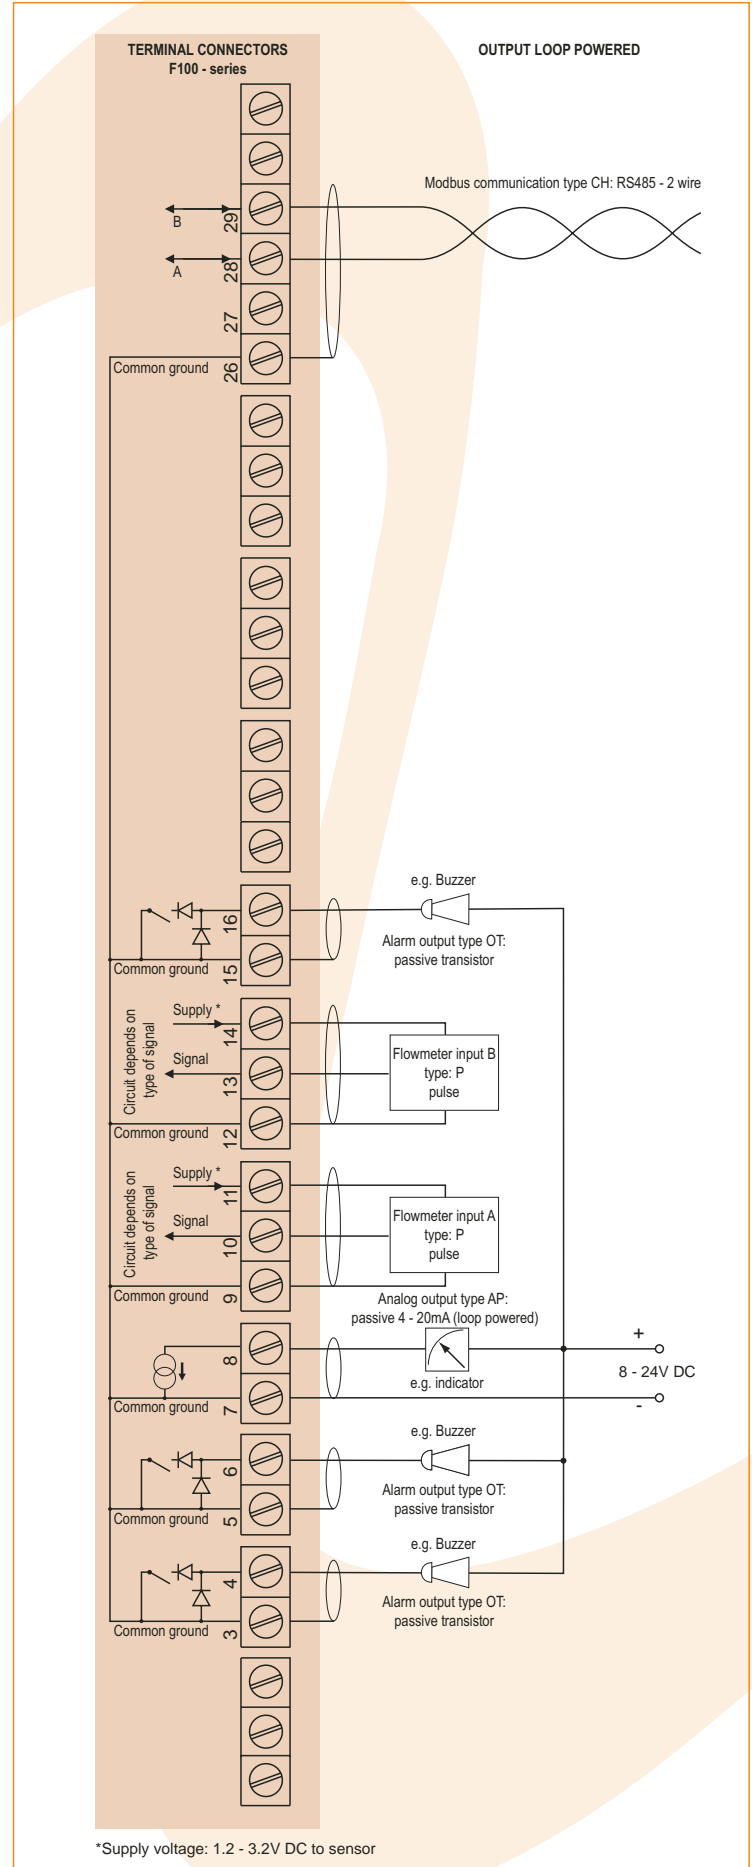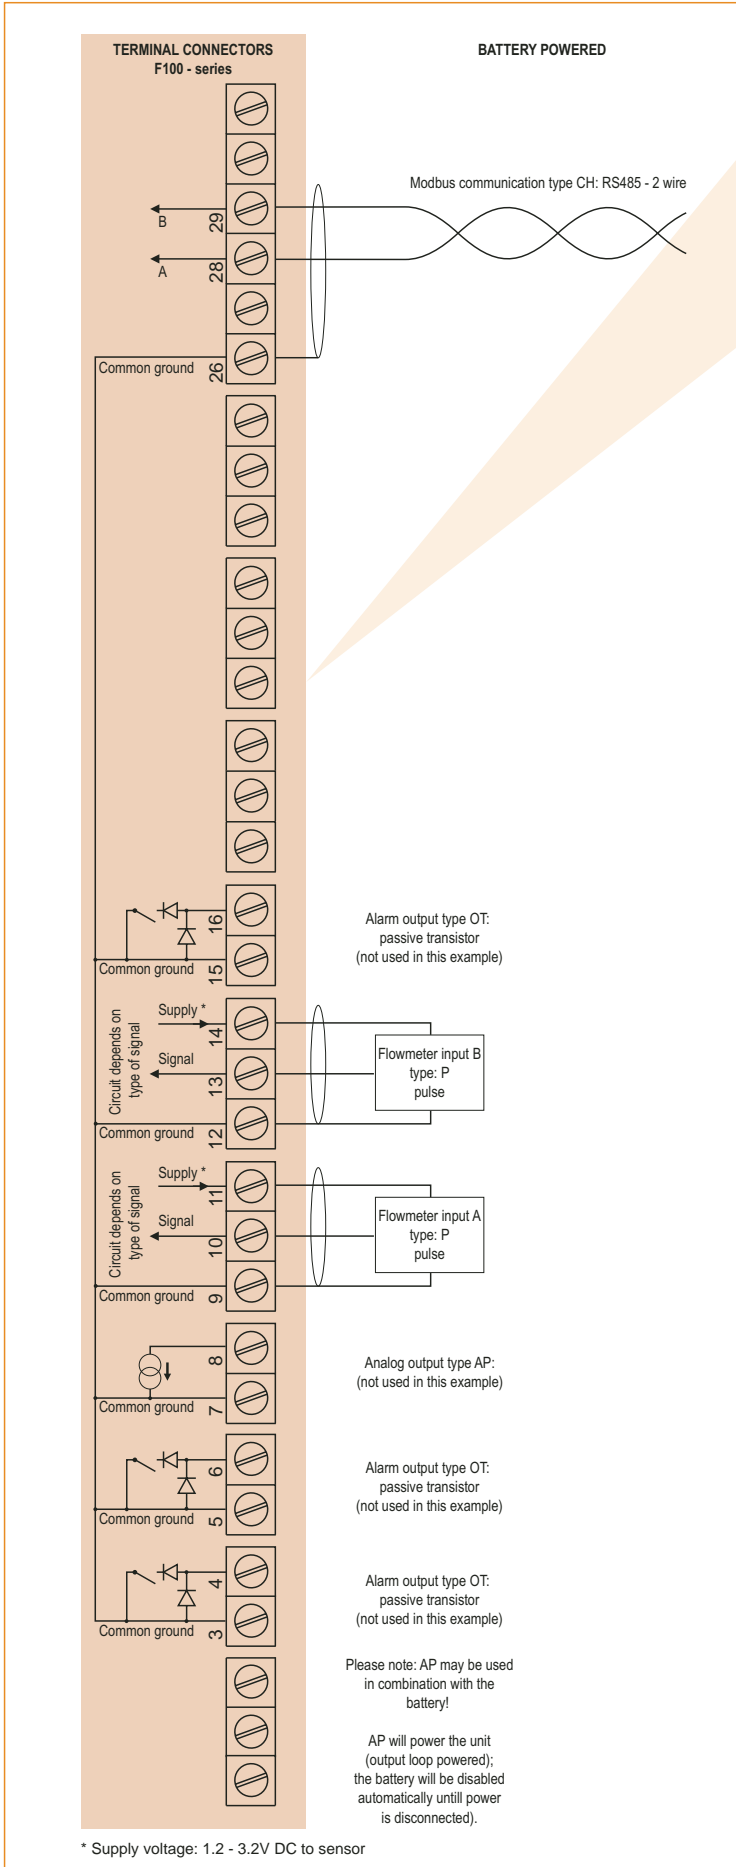


Typical wiring diagram F114-A-AA-CB-OA-PD

Typical wiring diagram F114-A-AI-CI-OR-PM

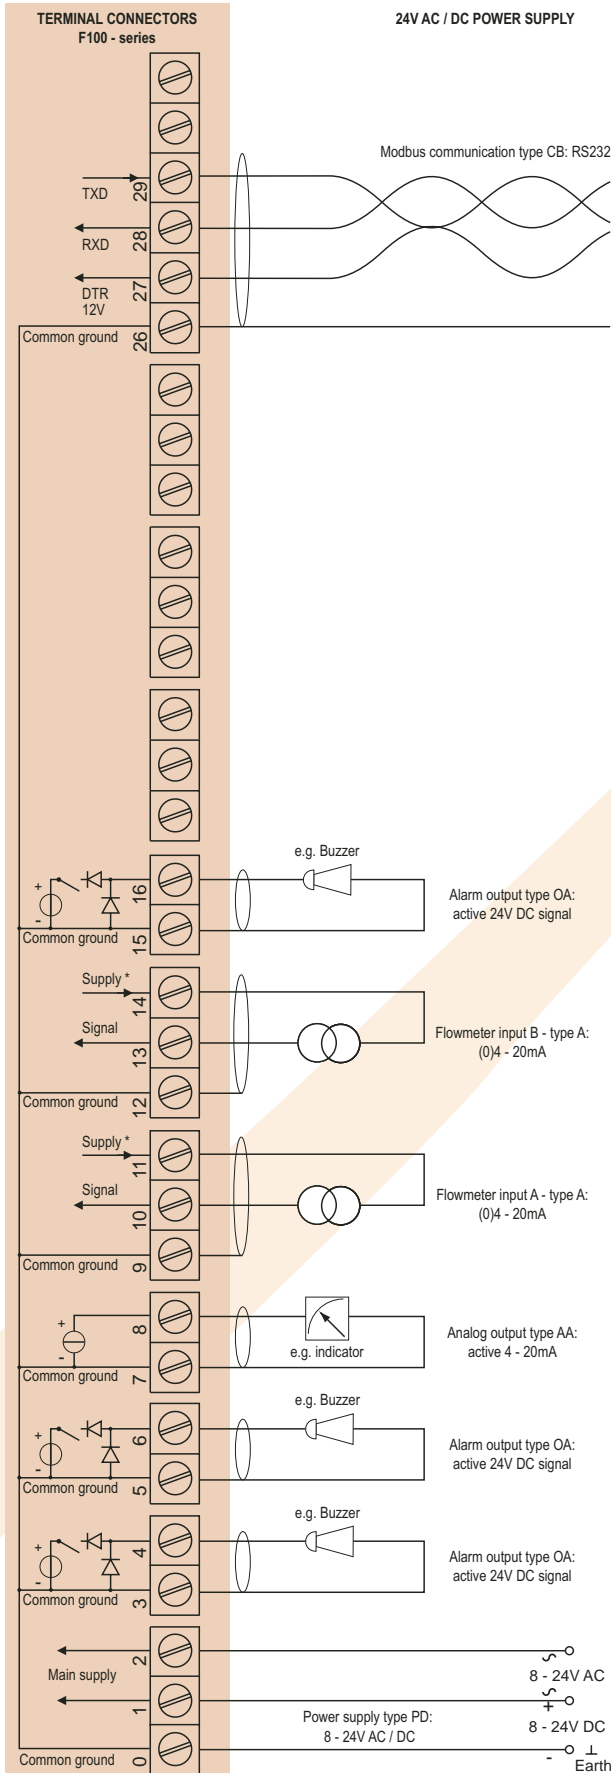

\*Supply voltage: 3.2 - 8.2 - 12 - 24V DC to sensor

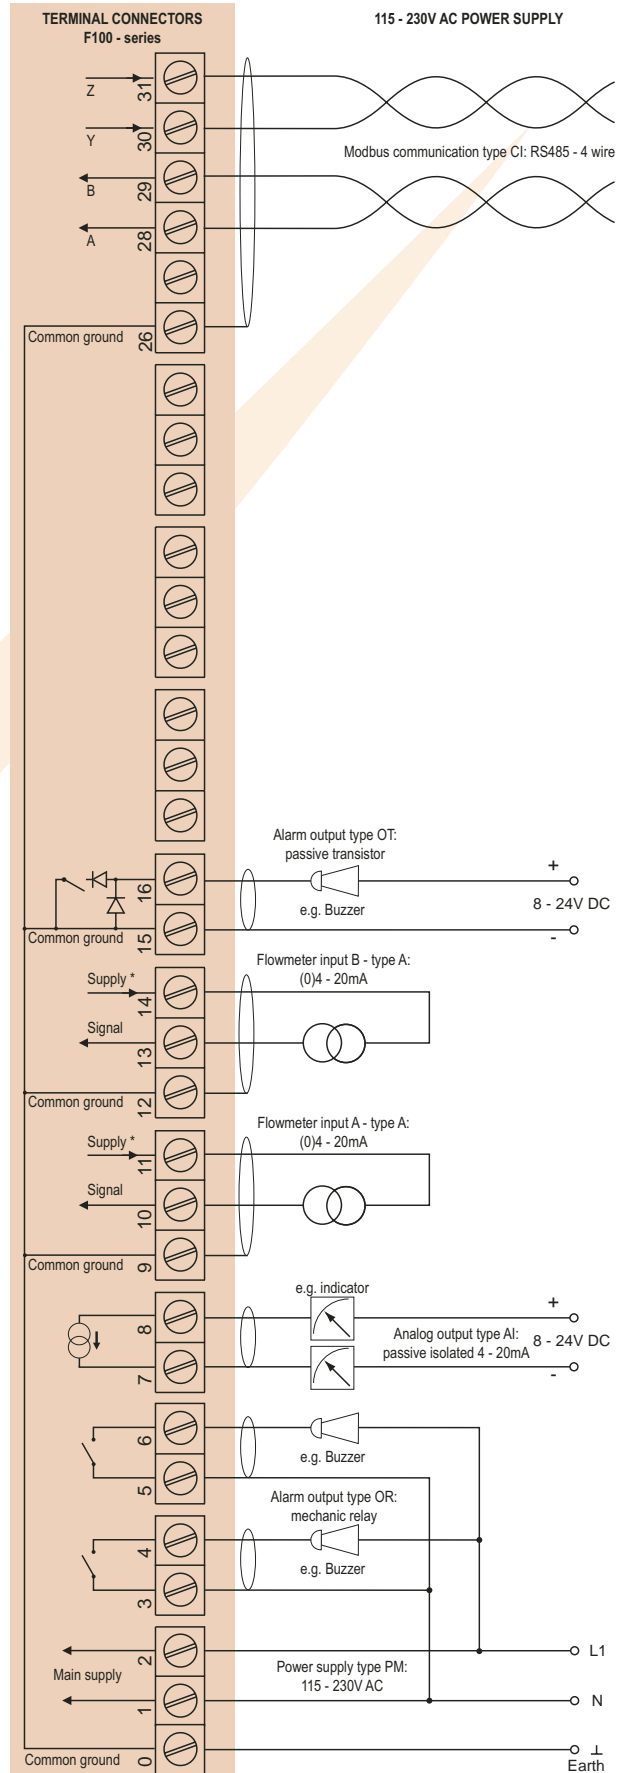

\*Supply voltage: 3.2 - 8.2 - 12 - 24V DC to sensor

## Hazardous area applications


The F114-XI has been ATEX approved by KEMA for use in intrinsically safe applications. It is approved according to  $\text{Ex}$  II 1GD EEx ia IIB/IIC T4 T100°C for gas and dust applications with an operational temperature range of -30°C to +70°C (-22°F to +158°F). Besides the two I.S. power supplies for the alarm outputs, it is allowed to connect up to four I.S. power supplies in IIB applications or one in IIC applications. Full functionality of the F114 remains available, including 4 - 20mA output, alarm outputs and Modbus communication (type CT). Power supply type PD-XI offers a 8.2V sensor supply e.g. for two Namur sensors. A flame proof enclosure with rating  $\text{Ex}$  II 2G EEx d IIB T5 is available as well. Please contact your supplier for further details.

### Certificate of conformity KEMA 03ATEX1074 X




## Configuration example IIB and IIC

### F114-P-(AP)-(CT)-(OT)-PB-XI - battery powered unit

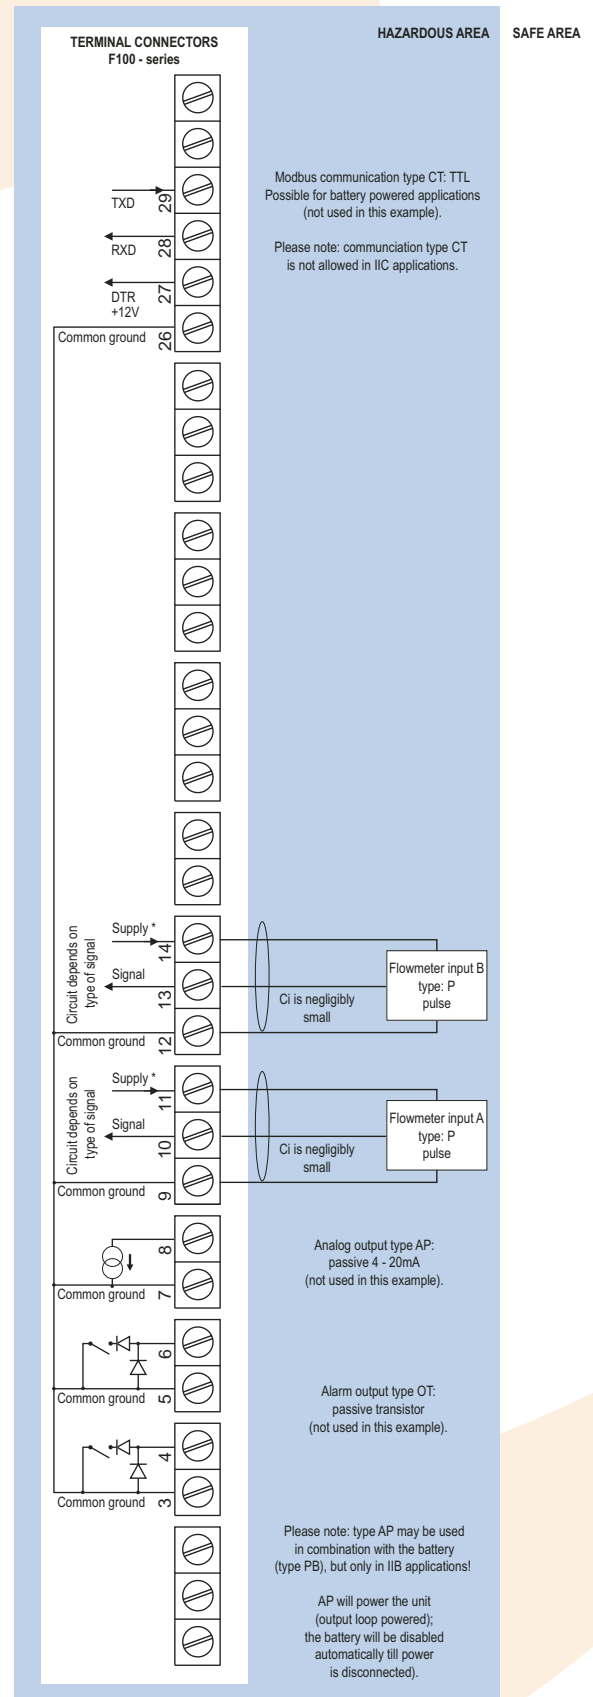


\* Note sensor supply voltage: 1.2V DC for coil sensors or 3.2V DC for other pulse sensors.

## Configuration example IIB and IIC - F114-P-AP-(CT)-OT-XI - output loop powered

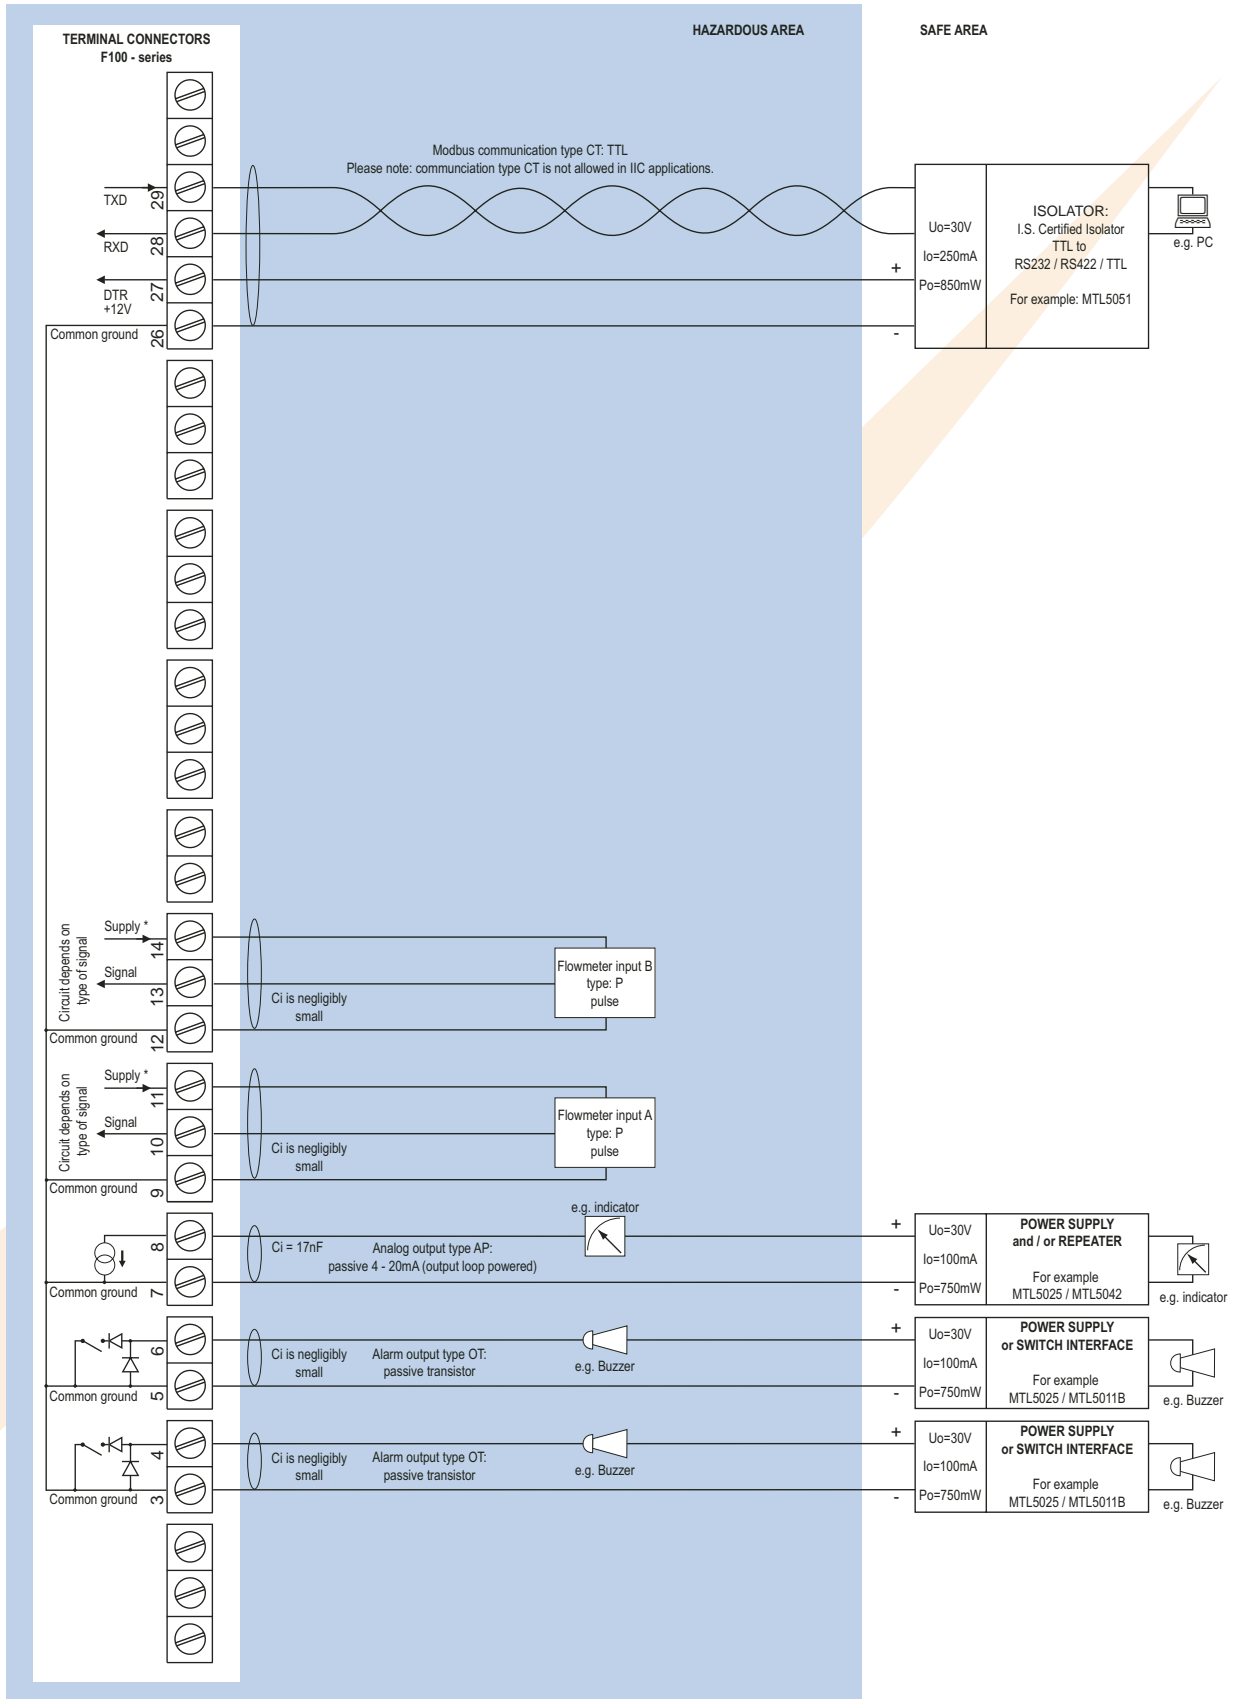


\* Note sensor supply voltage: 1.2V DC for coil sensors or 3.2V DC for other pulse sensors.

## Configuration example IIB and IIC - F114-A-AP-(CT)-OT-PD-XI - power supply 16 - 30V DC

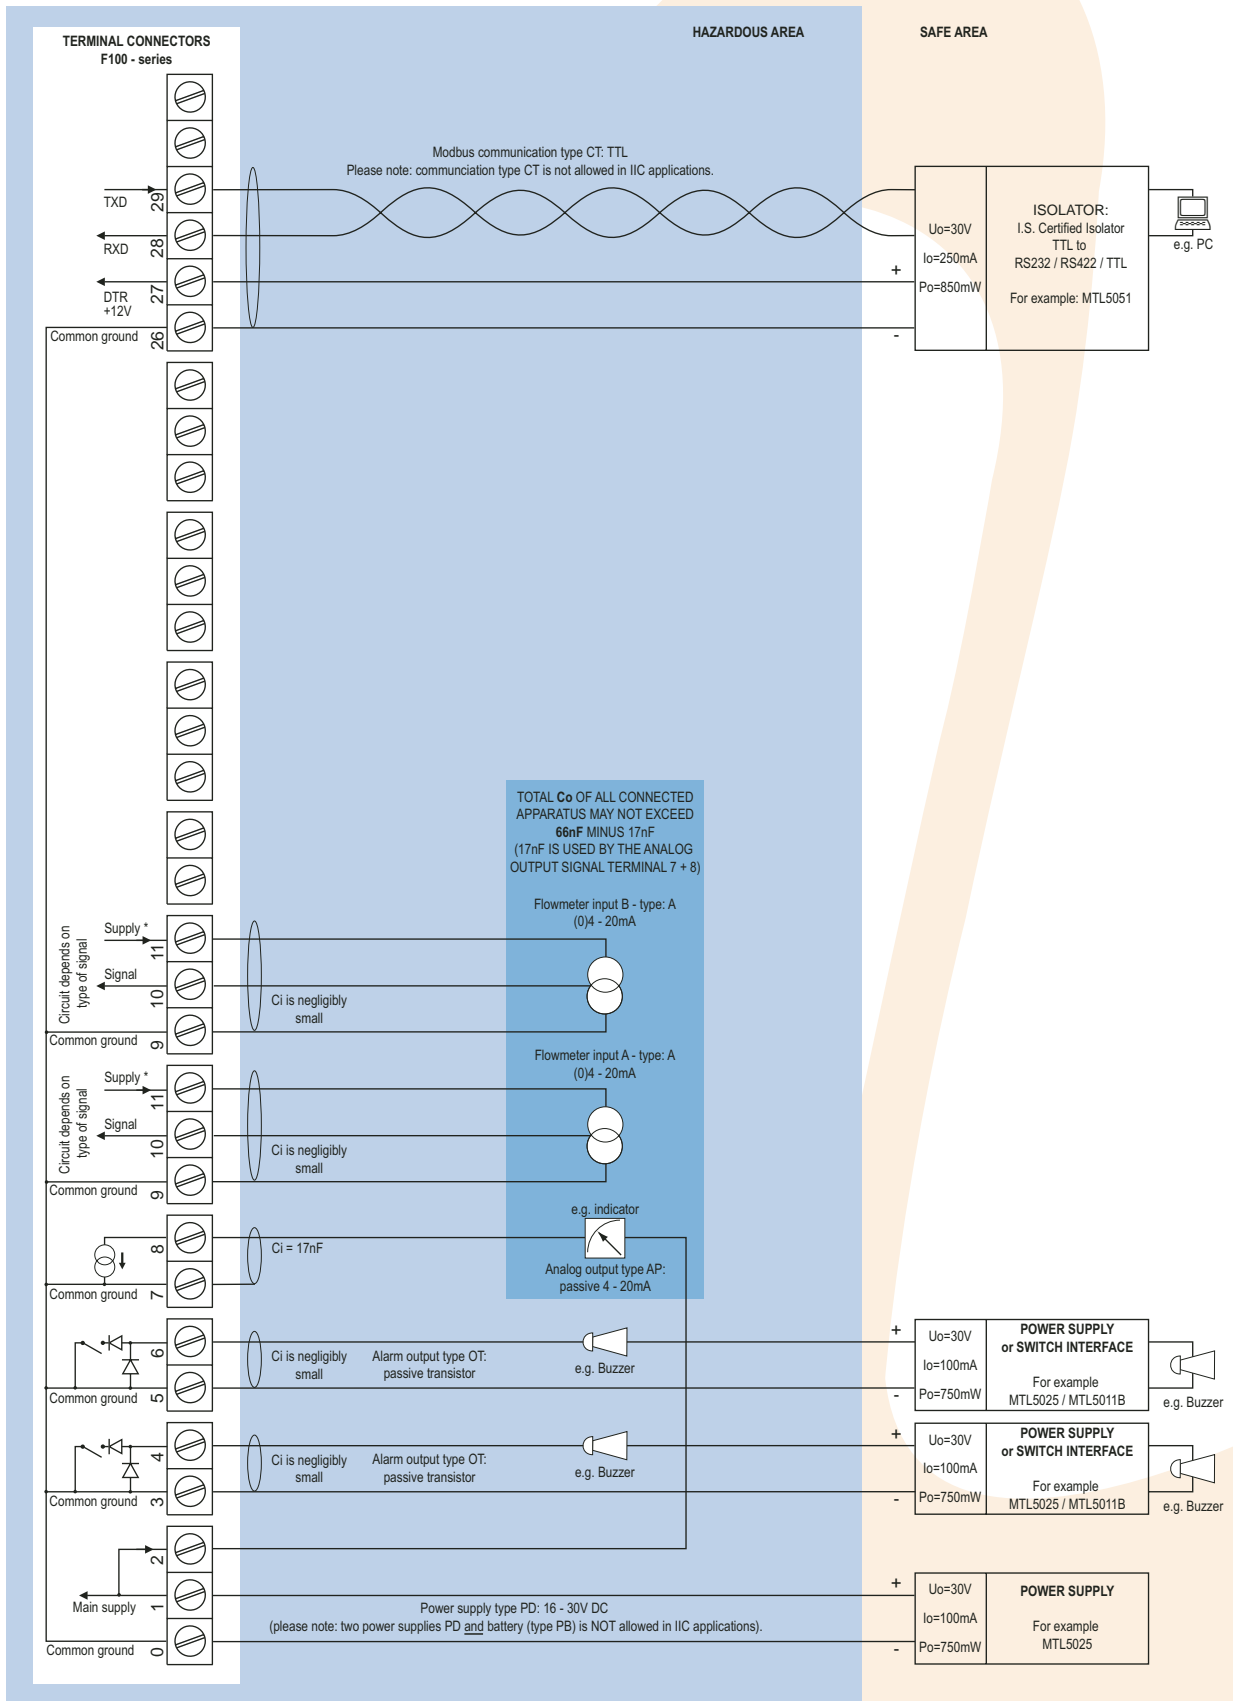

\* Note power supply type PD: the supply voltage to analog sensors is as connected to terminal 1 (internally linked) or 1.2 - 3.2 - 8.2V DC for pulse sensors.

**Configuration example IIB - F114-A-AF-CT-OT-(PB)-(PD)-(PL)-XI - power supply 16 - 30V DC, battery or loop powered**

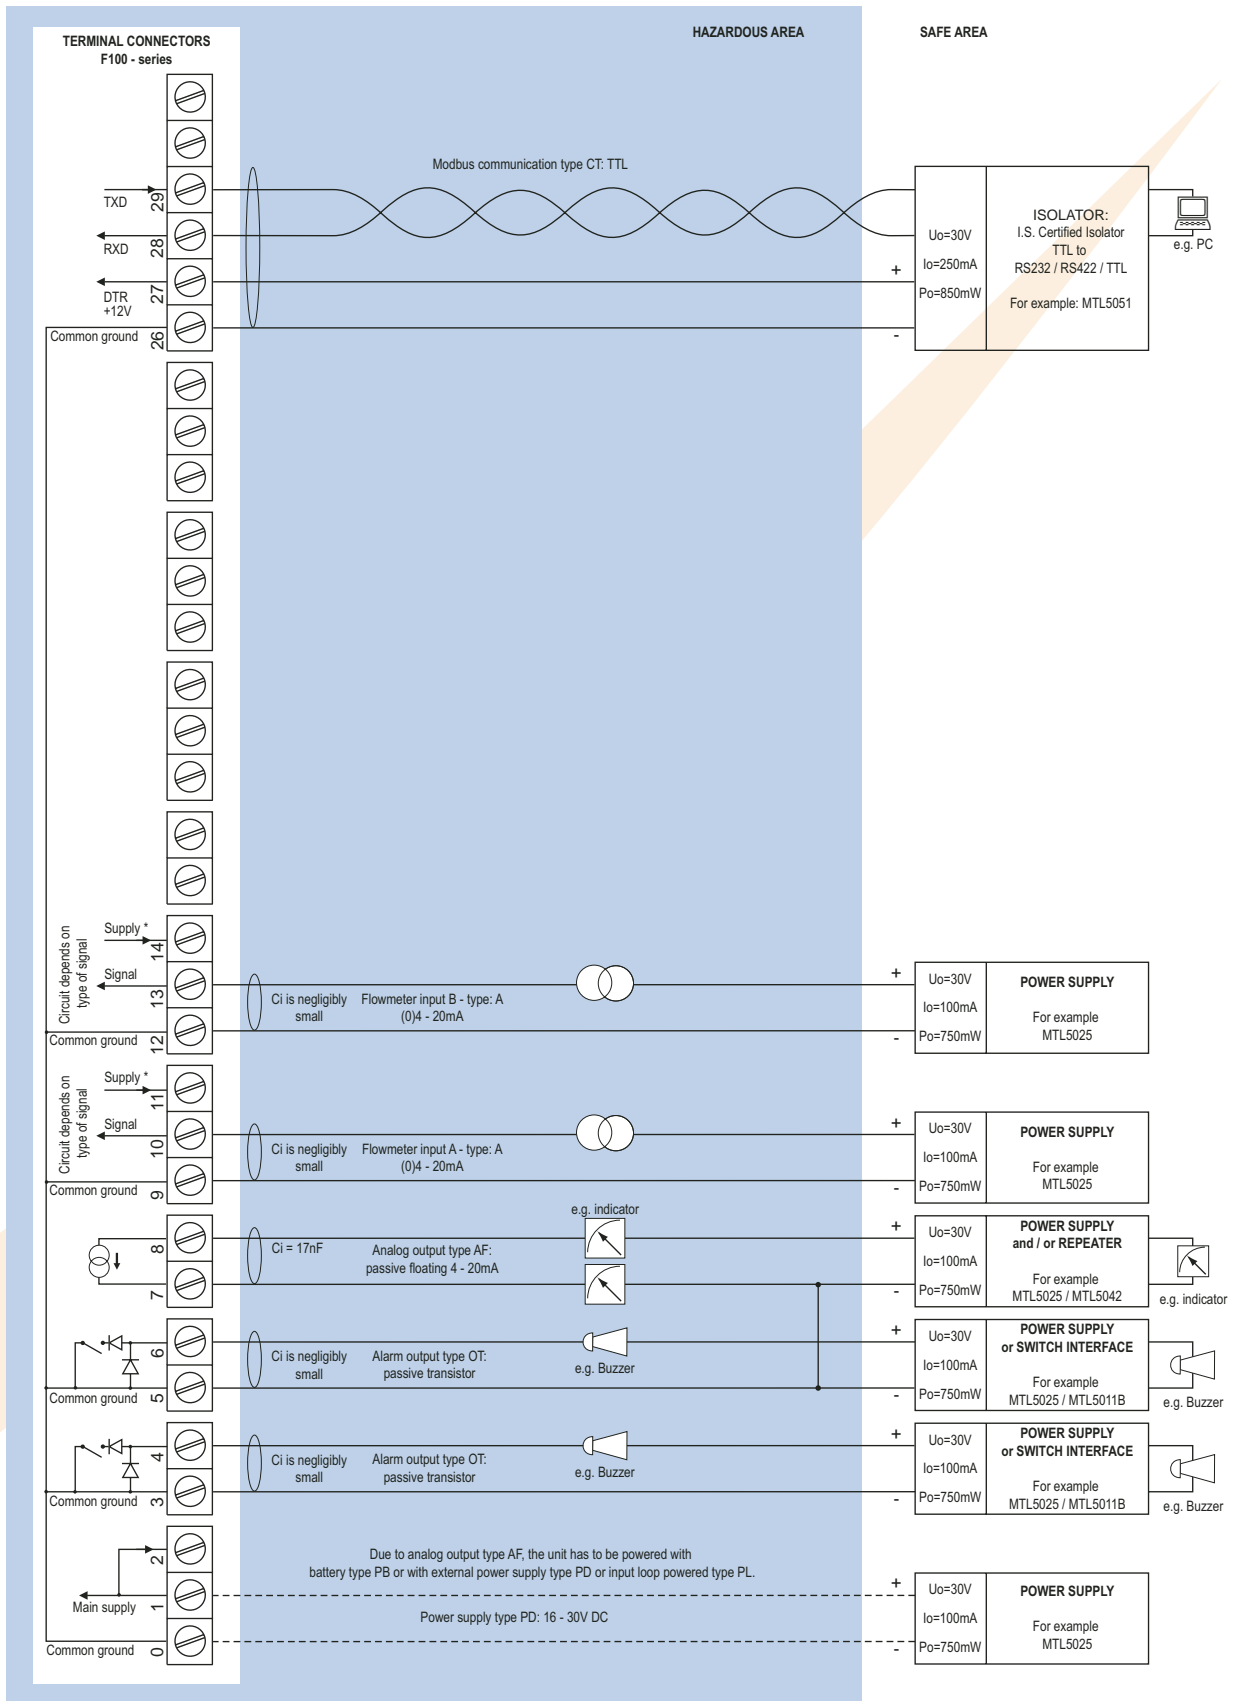

\* Note power supply type PD: the supply voltage to analog sensors is as connected to terminal 1 (internally linked) or 1.2 - 3.2 - 8.2V DC for pulse sensors.

## Technical specification

### General

Display	
Type	High intensity reflective numeric and alphanumeric LCD, UV-resistant.
Dimensions	90 x 40mm (3.5" x 1.6").
Digits	Seven 17mm (0.67") and eleven 8mm (0.31") digits. Various symbols and measuring units.
Refresh rate	User definable: 8 times/sec. - 30 secs.
Option ZB	LED-backlight.

Casing	
Window	Polycarbonate window.
Sealing	EPDM and PE.
Control keys	Three industrial micro-switch keys. UV-resistant polyester keypad.
Type HA	Die-cast aluminum field mount enclosure IP67 / NEMA 4X with 2-component UV-resistant coating.
Dimensions	130 x 114 x 58mm (5.1" x 4.5" x 2.28") - W x H x D.
Cable Entry	2 x PG9 and 1 x M20 tapped hole in the centre.
Weight	950 gr.
Type HB	Die-cast aluminum panel mount enclosure IP65 / NEMA 4 with 2-component UV-resistant coating.
Dimensions	130 x 114 x 50mm (5.1" x 4.5" x 1.97") - W x H x D.
Panel cut-out	115 x 96mm (4.53" x 3.78") L x H.
Weight	525 gr.
Type HC	ABS panel mount enclosure IP65 / NEMA 4, UV-resistant and flame retardant.
Dimensions	130 x 114 x 48mm (5.1" x 4.5" x 1.89") - W x H x D.
Panel cut-out	115 x 96mm (4.53" x 3.78") L x H.
Weight	300 gr.
Type HD	ABS wall mount enclosure IP67 / NEMA 4X, UV-resistant and flame retardant.
Dimensions	130 x 114 x 71mm (5.1" x 4.5" x 2.8") - W x H x D.
Cable Entry	None, user defined.
Weight	400 gr.
Type HU	Die-cast aluminum field mount enclosure IP67 / NEMA 4X with 2-component UV-resistant coating.
Dimensions	5.1" x 4.5" x 2.28" - W x H x D.
Cable Entry	3 x 1/2" NPT tapped hole.
Weight	950 gr.



Operating temperature	
Operational	-30°C to +80°C (-22°F to +178°F).

Power requirements	
Type PB	Long life Lithium battery - life-time depends upon settings and configuration - up to 5 years.
Type PD	8 - 24V AC/DC ± 10%.
Type PD-XI	16 - 30V DC (Intrinsically Safe).
Type PF	24V AC/DC ± 10%.
Type PL	Input loop powered from sensor signal 4 - 20mA (type "A") - requires types AI or AF and OT.
Type PM	115 - 230V AC ± 10%.
Type PX	8 - 28V DC output loop powered unit with analog output signal type AP (or 8 - 24 V AC/DC if type AP will not be used).

Sensor excitation	
Type PB / PX	3.2V DC for pulse signals and 1.2V DC for coil pick-up.
Type PD	1.2 - 3.2 - 8.2 - 12 and 24V DC - max. 50mA@24V DC.
Type PD-XI	1.2 - 3.2 - 8.2V DC - max. 7mA@8.2V DC and mains power supply voltage (as connected to terminal 1).
Note	In case PD-XI and signal input type A or U, the sensor supply voltage will be according to power supply as connected to terminal 1.
Type PF / PM	1.2 - 3.2 - 8.2 - 12 and 24V DC - max. 200mA@24V DC.

Terminal connections	
Type	Removable plug-in terminal strip. Wire max. 1.5mm <sup>2</sup> and 2.5mm <sup>2</sup> .

Data protection	
Type	EEPROM backup of all settings. Backup of running totals every minute. Data retention at least 10 years.
Pass-code	Configuration settings can be pass-code protected.

Hazardous area	
Intrinsically safe	ATEX approval ref:  II 1GD EEx ia IIB/IIC T4 T100°C.
Type XI	Maximum ambient +70°C (158°F).
Explosion proof	ATEX approval ref:  II 2G EEx d IIB T5.
Type XD/XF	Dimensions of enclosure: 218 x 418 x 210mm (8.58" x 16.45" x 8.38") L x H x D.
Weight	16 Kg.

Environment	
Electromagnetic compatibility	Compliant ref: EN 61326 (1997), EN 61010-1 (1993).

Signal inputs	
Flowmeter	
Type P	Coil / sine wave (minimum 20mVpp or 80mVpp - sensitivity selectable), NPN/PNP, open collector, reed-switch, Namur, active pulse signals 8 - 12 and 24V DC.
Frequency	Minimum 0Hz - maximum 7kHz for total and flowrate. Maximum frequency depends on signal type and internal low-pass filter. E.g. reed switch with low-pass filter: max. frequency 120Hz.
K-Factor	0.000010 - 9,999,999 with variable decimal position.
Low-pass filter	Available for all pulse signals.
Option ZF	coil sensitivity 10mVpp.
Type A	(0)4 - 20mA. Analog input signal can be scaled to any desired range within 0 - 20mA.
Type U	0 - 10V DC. Analog input signal can be scaled to any desired range within 0 - 10V DC.
Accuracy	14 bit. Error < 0.05%. Low level cut-off programmable.
Span	0.000010 - 9,999,999 with variable decimal position.
Update time	Four times per second.
Voltage drop	Type A: 2.5V@20mA.
Load impedance	Type U: 3kΩ.
Relationship	Linear and square root calculation.
Note	For signal type A and U: external power to sensor is required; e.g. type PD.

## Signal outputs

### Analog output

Function	Transmitting ratio, flowrate A or flowrate B.
Accuracy	10 bit. Error < 0.05%. Analog output signal can be scaled to any desired range.
Update time	Ten times per second.
Type AA	Active 4 - 20mA output (requires OA + PD, PF or PM).
Type AB	Active 0 - 20mA output (requires OA + PD, PF or PM).
Type AF	Passive floating 4 - 20mA output for Intrinsically Safe applications (requires PB, PD or PL).
Type AI	Passive galvanically isolated 4 - 20mA output - also available for battery powered models (requires PB, PD, PF, PL or PM).
Type AP	passive 4 - 20mA output - not isolated. Unit will be loop powered.
Type AU	Active 0 - 10V DC output (requires OA + PD, PF or PM).

### Alarm output

Function	User defined: low, low-low, high, high-high or all alarms output.
Type OA	Three active 24V DC transistor outputs (PNP); max. 50mA per output (requires AA + PD, PF or PM).
Type OR	Two electro-mechanical relay outputs isolated (N.O.) - max. switch power 230V AC - 0.5A (requires PF or PM) and one transistor output OT or OA (OA in combination with AA only).
Type OT	Three passive transistor outputs (NPN) - not isolated.
Load	Max. 50V DC - 300mA per output.
Note	Intrinsically Safe applications: only two transistor outputs type OT available.

### Communication option

Function	Reading display information, reading / writing all configuration settings.
Type CB	RS232
Type CH	RS485 2-wire
Type CI	RS485 4-wire
Type CT	TTL Intrinsically Safe.
Protocol	Modbus RTU.
Speed	1200 - 2400 - 4800 - 9600 baud.
Addressing	Maximum 255 addresses.

## Operational

### Operator functions

Displayed functions	<ul style="list-style-type: none"> <li>• Ratio</li> <li>• low-low ratio alarm value.</li> <li>• low ratio alarm value.</li> <li>• high ratio alarm value.</li> <li>• high-high ratio alarm value.</li> <li>• Flowrate A (can be hidden)</li> <li>• Total A (can be hidden)</li> <li>• Flowrate B (can be hidden)</li> <li>• Total B (can be hidden)</li> <li>• Totals can be reset to zero by pressing the CLEAR-key twice.</li> <li>• Alarm values can be set (or only displayed).</li> </ul>
---------------------	--

### Ratio

Digits	5
Units	1-xxx or %
Decimals	3

### Total

Digits	7 digits.
Units	L, m3, GAL, USGAL, KG, lb, bbl, no unit.
Decimals	0 - 1 - 2 or 3.
Note	Total can be reset to zero.




### Flowrate

Digits	7 digits.
Units	mL, L, m3, Gallons, KG, Ton, lb, bl, cf, RND, ft3, scf, Nm3, NL, ical - no units.
Decimals	0 - 1 - 2 or 3.
Time units	/sec - /min - /hr - /day.


### Alarm values

Digits	7 digits.
Units	According to selection for ratio.
Decimals	According to selection for ratio.
Type of alarm	Low, high, low-low or high-high ratio alarm. Includes alarm delay time and configurable alarm outputs.

## Ratio

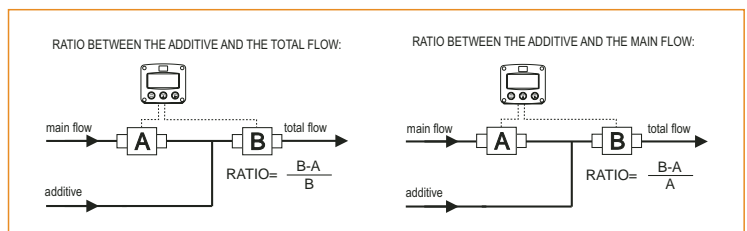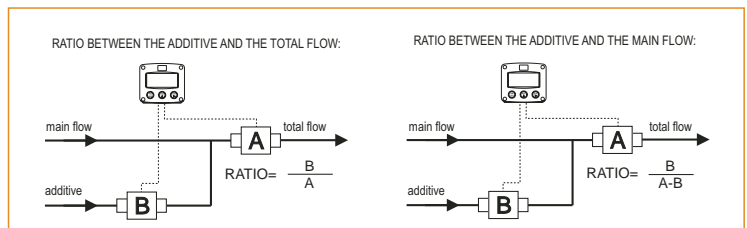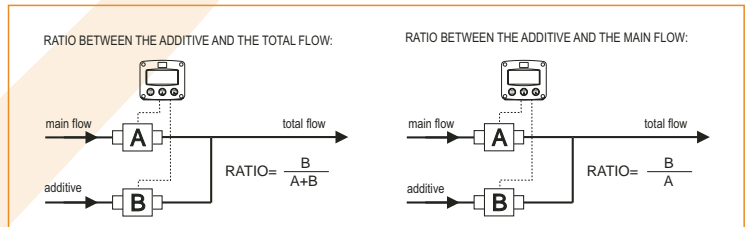

### Display example - 90 x 40mm (3.5" x 1.6")

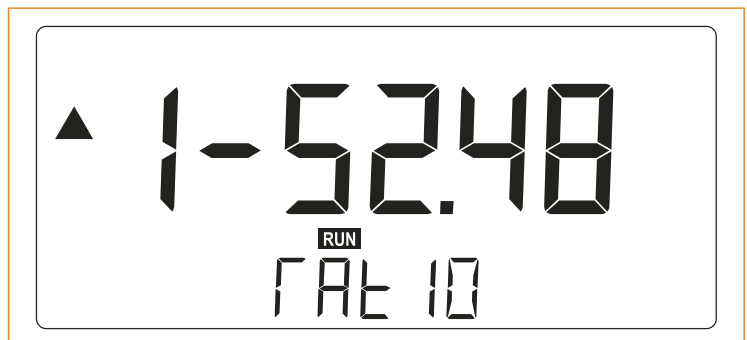

## Ordering information

Example (standard configuration)

F114-P-AP-CX-HC-OT-PX-XX-ZX.

### Explanation standard configuration:

P: flowmeter signal: pulse; AP: passive 4 - 20mA analog output; CX: no communication; HC: ABS panel mount enclosure; OT: passive transistor output; PX: the unit is powered by the analog output loop, type AP: 8 - 28V DC (or AC); XX: Safe area; ZX: no options.

Ordering information:	F114	-	-A	-C	-H	-O	-P	-X	-Z
<b>Flowmeter input signal</b>									
A	⊗								
(0)4 - 20mA input.									
P	⊗								
<b>Pulse input: coil, npn, pnp, namur, reed-switch.</b>									
U	⊗								
0 - 10V DC input.									
<b>Analog output signal</b>									
AA									
Active 4 - 20mA output - requires OA + PD, PF or PM.									
AB									
Active 0 - 20mA output - requires OA + PD, PF or PM.									
AF	⊗								
I.S. floating 4 - 20mA output - requires PB, PD or PL.									
AI									
Isolated 4 - 20mA output - requires PB, PD, PF, PL or PM.									
AP	⊗								
<b>Passive 4 - 20mA output, loop powered unit.</b>									
AU									
Active 0 - 10V DC output - requires OA + PD, PF or PM.									
<b>Communication</b>									
CB									
Communication RS232 - Modbus RTU.									
CH									
Communication RS485 - 2wire - Modbus RTU.									
CI									
Communication RS485 - 4 wire - Modbus RTU.									
CT	⊗								
Intrinsically Safe TTL - Modbus RTU.									
CX	⊗								
<b>No communication.</b>									
<b>Enclosure</b>									
HA	⊗								
Aluminum field mount enclosure IP67 / NEMA 4X.									
HB	⊗								
Aluminum panel mount enclosure IP65 / NEMA 4.									
HC	⊗								
<b>ABS panel mount enclosure IP65 / NEMA 4.</b>									
HD	⊗								
ABS wall mount enclosure IP67 / NEMA 4X.									
HU	⊗								
Aluminum field mount enclosure IP67 / NEMA 4X.									
<b>Outputs</b>									
OA									
Three active transistor outputs - requires AA, AB or AU and PD, PF or PM.									
OR									
Two mechanic relay outputs + one OT or OA - requires PF or PM.									
OT	⊗								
<b>Three passive transistor outputs - standard configuration.</b>									
<b>Power supply</b>									
PB	⊗								
Lithium battery powered.									
PD	⊗								
8 - 24V AC/DC + sensor supply - with XI: 16 - 30V DC.									
PF									
24V AC/DC + sensor supply.									
PL	⊗								
Input loop powered from sensor signal type "A" - requires AI or AF and OT.									
PM									
115 - 230V AC + sensor supply.									
PX	⊗								
<b>No power supply option. Unit requires external loop AP.</b>									
<b>Hazardous area</b>									
XI	⊗								
Intrinsically safe.									
XD	⊗								
EExd enclosure - 1 key.									
XF	⊗								
EExd enclosure - 3 keys.									
XX									
<b>Safe area only.</b>									
<b>Other options</b>									
ZB									
Backlight.									
ZF	⊗								
Coil input 10mVpp.									
ZX	⊗								
<b>No options.</b>									

The bold marked text contains the standard configuration.

⊗ Available Intrinsically Safe.

Specifications are subject to change without notice.

FLUIDWELL bv  
P.O. Box 6  
5460 AA - Veghel - The Netherlands  
Tel.: +31 (0)413 343786  
Fax.: +31 (0)413 363443  
sales@fluidwell.com  
Internet: www.fluidwell.com

