

FLOWRATE INDICATOR / TOTALIZER

WITH LINEARISATION AND ANALOG / PULSE
SIGNAL OUTPUTS



Features

- Displays instantaneous flowrate, total and accumulated total.
- 15 point linearisation of the flowcurve - with interpolation.
- Large 17mm (0.67") digit selection for flowrate or total.
- Selectable on-screen engineering units; volumetric or mass.
- Auto backup of settings and running totals.
- Operational temperature -30°C up to +80°C (-22°F up to 178°F).
- Very compact design for panel mount, wall mount or field mount applications.
- Rugged aluminum field mount enclosure IP67/NEMA4X.
- Intrinsically safe
⊕ II 1GD EEx ia IIB/IIC T4 T100°C.
- Explosion/flame proof ⊕ II 2G EEx d IIB T5.
- Analog and pulse signal outputs.
- Full Modbus communication RS232/485/TTL.
- Loop or battery powered, 8 - 24V AC/DC or 115 - 230V AC power supply.
- Sensor supply 3.2 - 8.2 - 12 - 24V DC.

Signal output

- (0)4 - 20mA / 0 - 10V DC according to linearised flowrate.
- Scaled pulse output according to linearised accumulated total.


Signal input

Flow

- Reed-switch.
- NAMUR.
- NPN/PNP pulse.
- Coil (sine wave).
- Active pulse signals.
- (0)4 - 20mA.
- 0 - 10V DC.

Applications

- Liquid flow measurement with mechanic flowmeters where a precise calculation over the full measurement range is required. Also re-transmission of the flowrate and/or totaliser functions or serial communication is desired. Alternative basic model: F016.

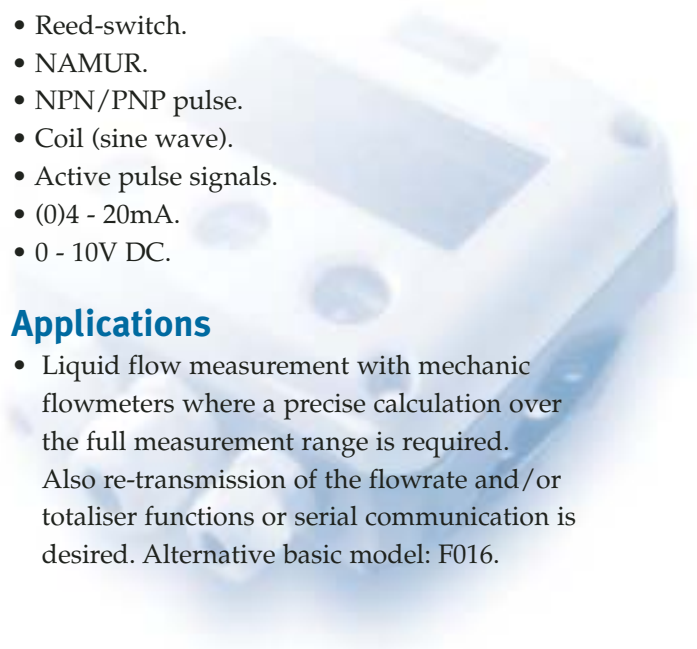

General information

Introduction

The F112 provide very precise linearisation of the flowmeters signal. In addition to the average K-Factor or Span, fifteen linearisation points can be entered with there frequencies or values. The unit will interpolate between these points greatly enhancing accuracy in any flowrange. Even for very low frequency applications is catered for. This linearisation effects all displayed information as well as the signal outputs. A wide selection of options further enhance this models capabilities, including intrinsic safety and full Modbus communication.

Display

The display has large 17mm (0.67") and 8mm (0.31") digits which can be set to show flowrate and totals. On-screen engineering units are easily configured from a comprehensive selection. The linearised accumulated total can register up to 11 digits and is backed-up in EEPROM memory every minute.

Configuration

All configuration settings are accessed via a simple operator menu which can be pass-code protected. Each setting is clearly indicated with an alphanumerical description, therefore avoiding confusing abbreviations. Once familiar with one F-series product, you will be able to program all models in the series without a manual. All settings are safely stored in EEPROM memory in the event of sudden power failure.

Analog output signal

The linearised flowrate is re-transmitted with the (0)4 - 20mA or 0 - 10V DC output signal. The output signal is updated ten times per second with a filter function being available to smoothen out the signal if desired.

The output value is user defined in relation to the flowrate, e.g. 4mA equals to 15L/Hr and 20mA equals to 2000L/Hr. The output signal can be passive, active or isolated where the passive output type will loop power the F112 as well.

Pulse output

The scaleable pulse output, reflects the count on the accumulated display. The pulse length is user defined from 0.008 second up to 2 seconds.

The maximum output frequency is 64Hz.

The output signal can be a passive NPN, active PNP or an isolated electro-mechanical relay.

Signal input

The F112 will accept most pulse and analog input signals for flow or mass flow measurement. The input signal type can be selected by the user in the configuration menu without having to adjust any sensitive mechanical dip-switches.

Communication

All process data and settings can be read and modified manually or through the Modbus communication link (RS232 / RS485).

Full Modbus functionality remains available for the Intrinsically Safe version (TTL).


Hazardous areas

For hazardous area applications, this model has been ATEX certified intrinsically safe $\text{Ex} \text{II} \text{1GD}$ EEx ia IIB / IIC T4 T100°C with an allowed operational temperature of -30°C to +70°C (-22°F to +158°F). A flame proof enclosure is also available with the rating $\text{Ex} \text{II} \text{2G}$ EEx d IIB T5.

Enclosures

Various types of enclosures can be selected, all ATEX approved. As standard the F112 is supplied in an ABS panel mount enclosure, which can be converted to an IP67 / NEMA 4X ABS field mount enclosure by the addition of a back case. Most popular is our rugged aluminum field mount enclosure with IP67 / NEMA 4X rating. Both European or U.S. cable gland entry threads are available.

Overview application F112

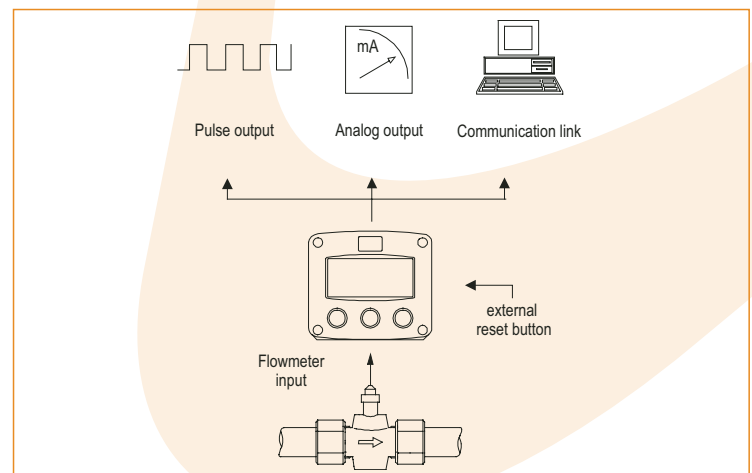


Dimensions enclosures

Enclosure HA

Aluminum field mount enclosure


IP67 / NEMA 4X
Tapped holes: European thread

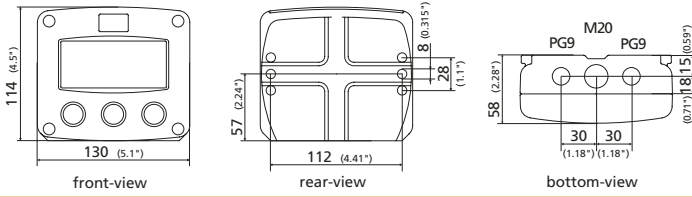

Enclosure HB

Aluminum panel mount enclosure


IP65 / NEMA 4

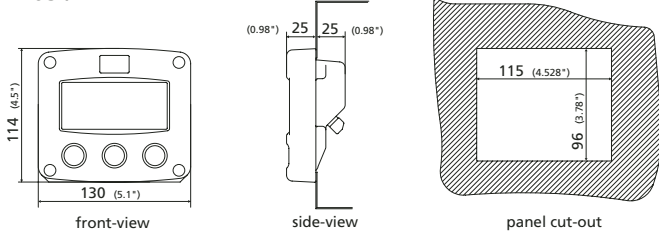

Enclosure HC (standard)

ABS panel mount enclosure


IP65 / NEMA 4

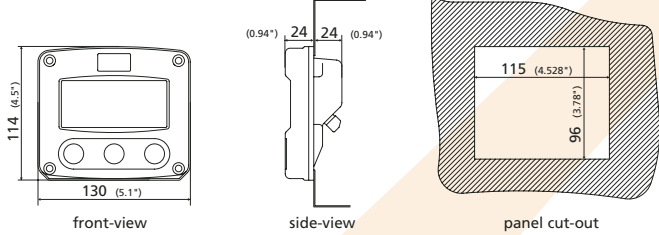

Enclosure HD

ABS wall mount enclosure


IP67 / NEMA 4X
Holes user defined

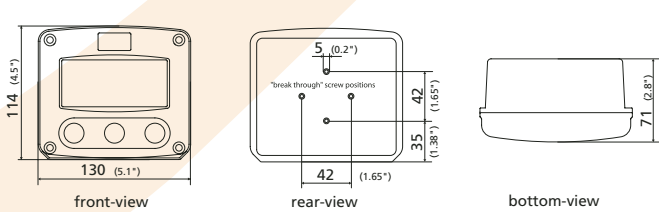


Enclosure HU

Aluminum field mount enclosure

IP67 / NEMA 4X
Tapped holes: U.S. thread


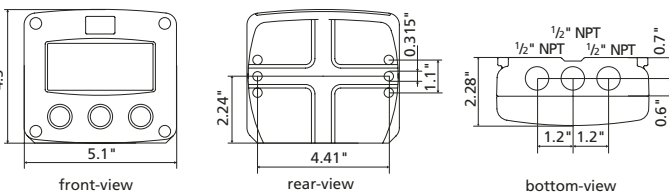


Terminal connections

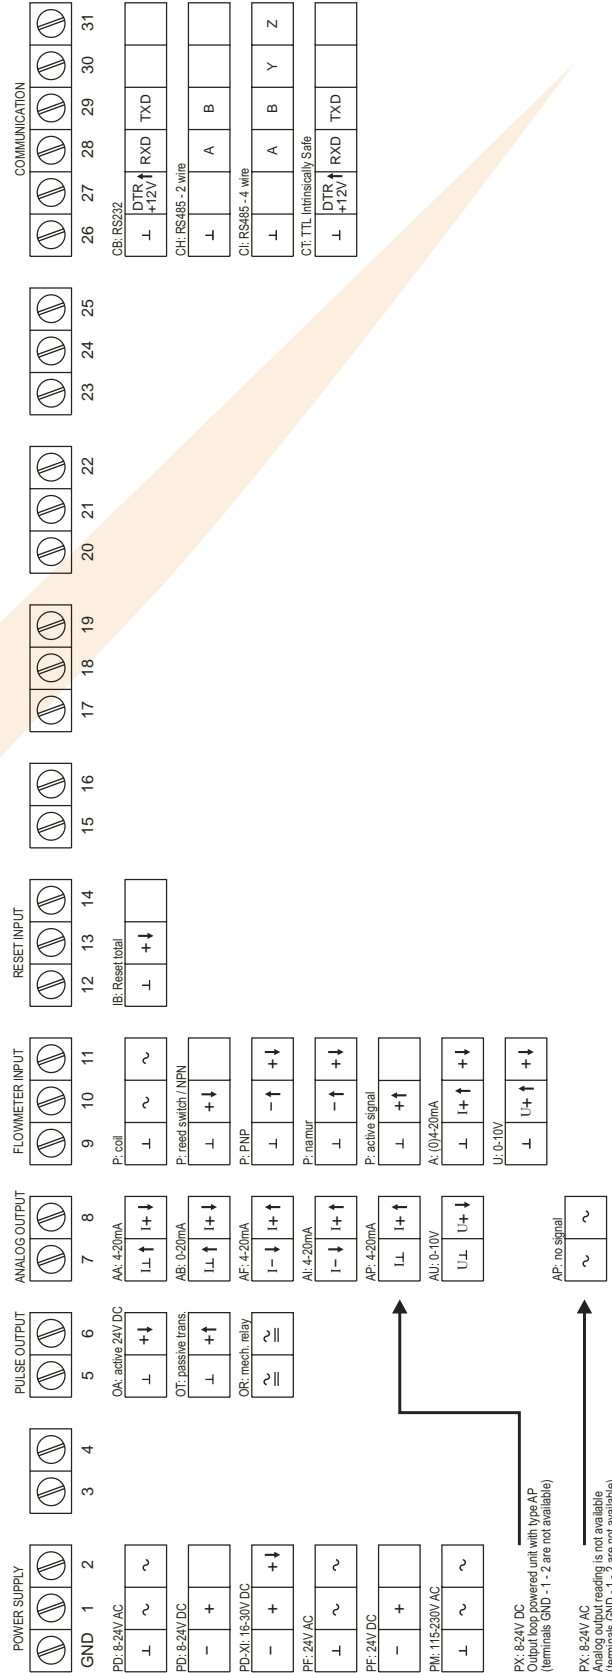


Typical wiring diagram F112-P-(AP)-CH-IB-PB-(OT)

Typical wiring diagram F112-P-AP-CH-IB-OT

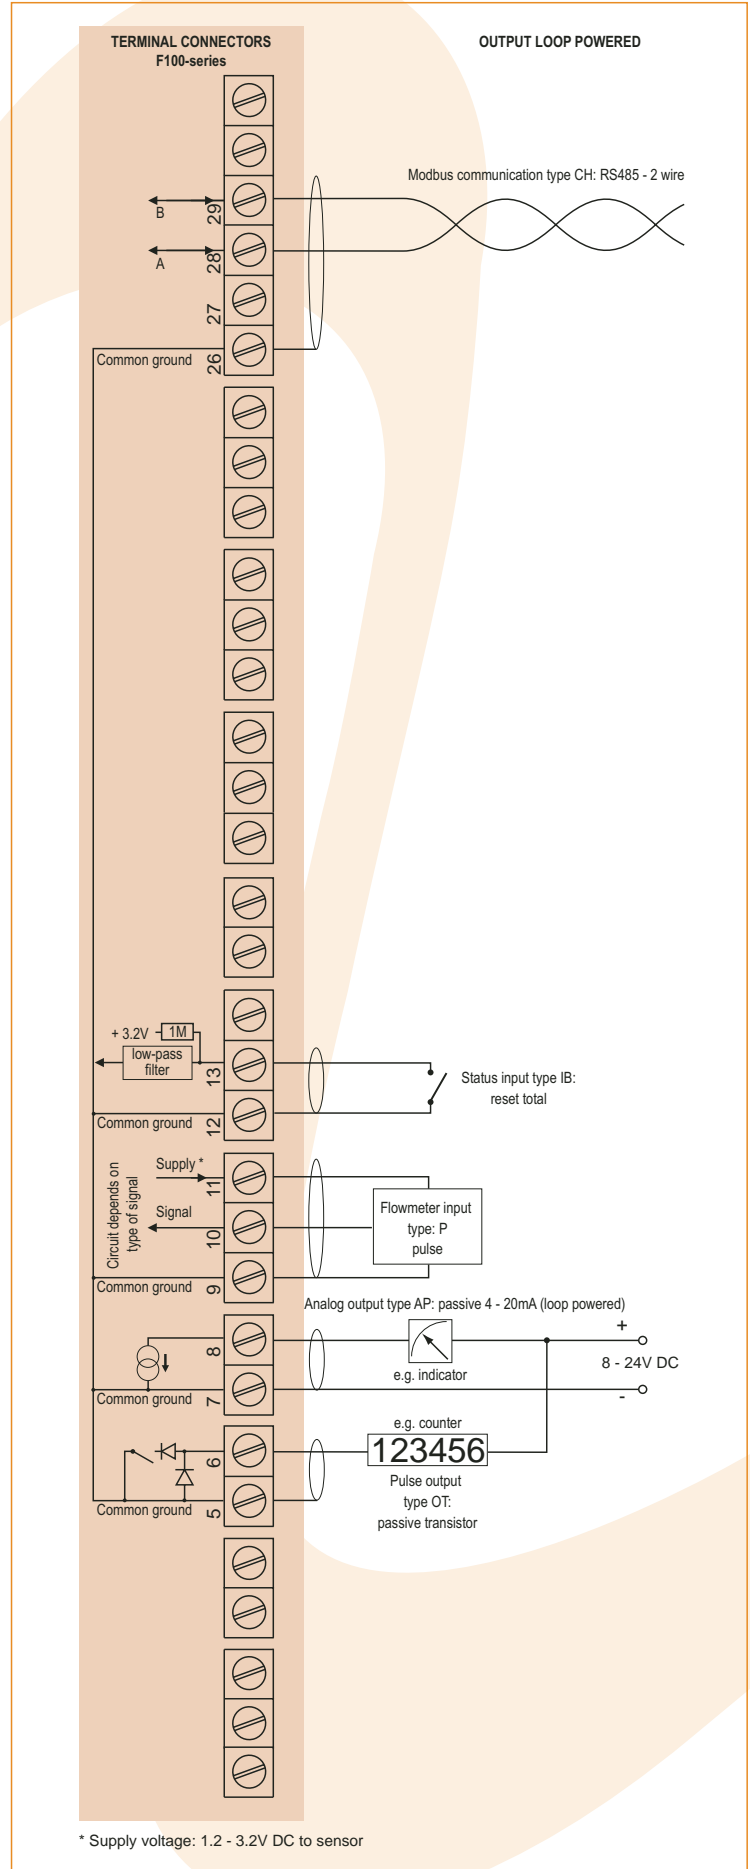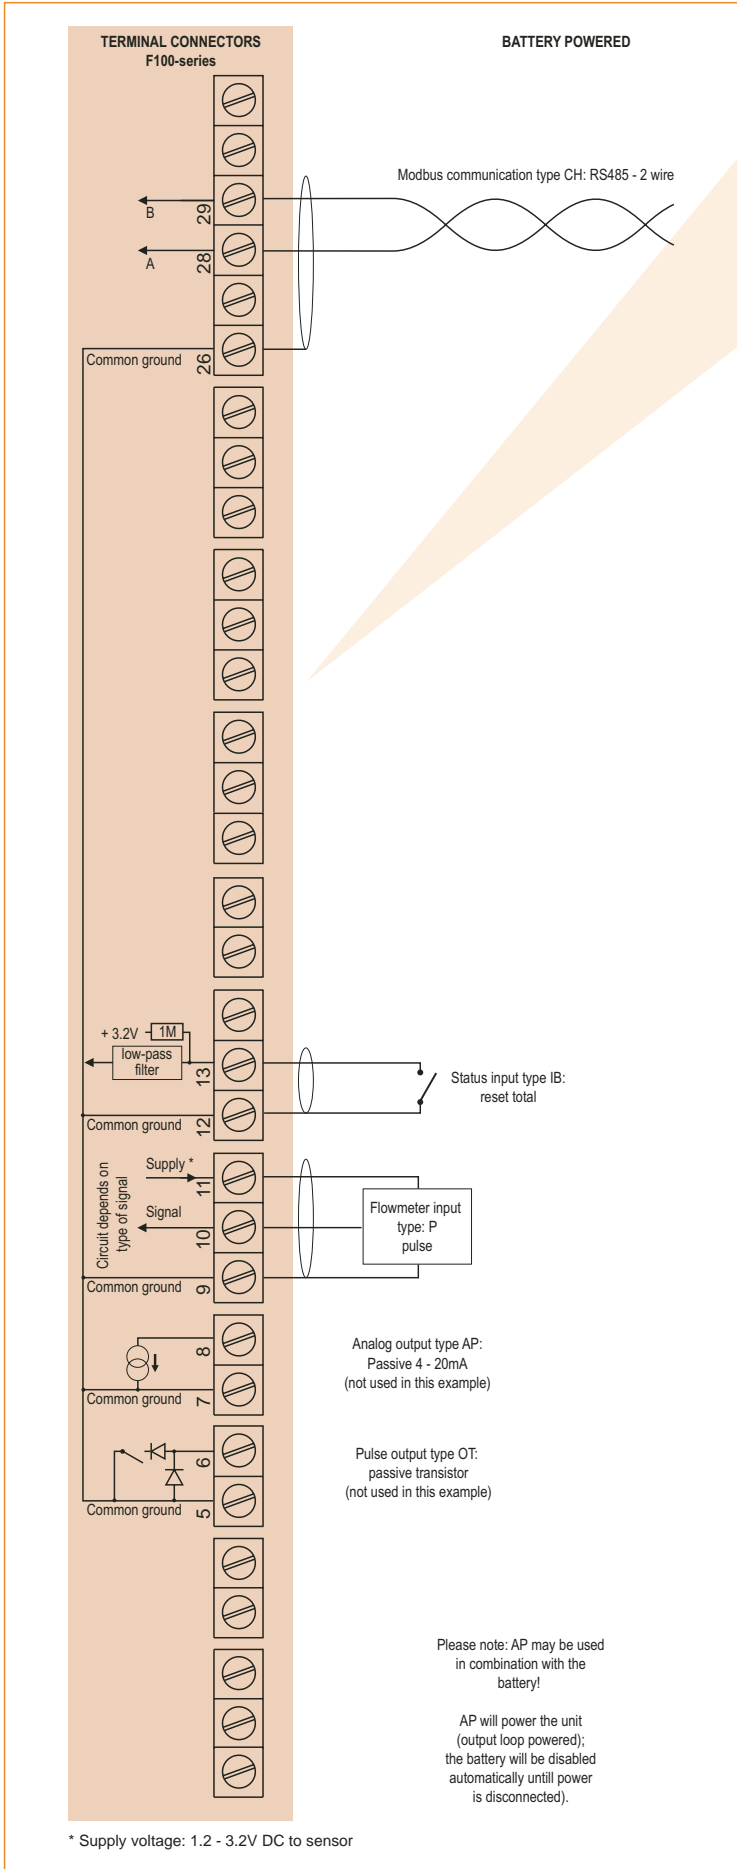


Typical wiring diagram F112-A-AA-CB-IB-OA-PD

Typical wiring diagram F112-A-AI-CI-IB-OR-PM

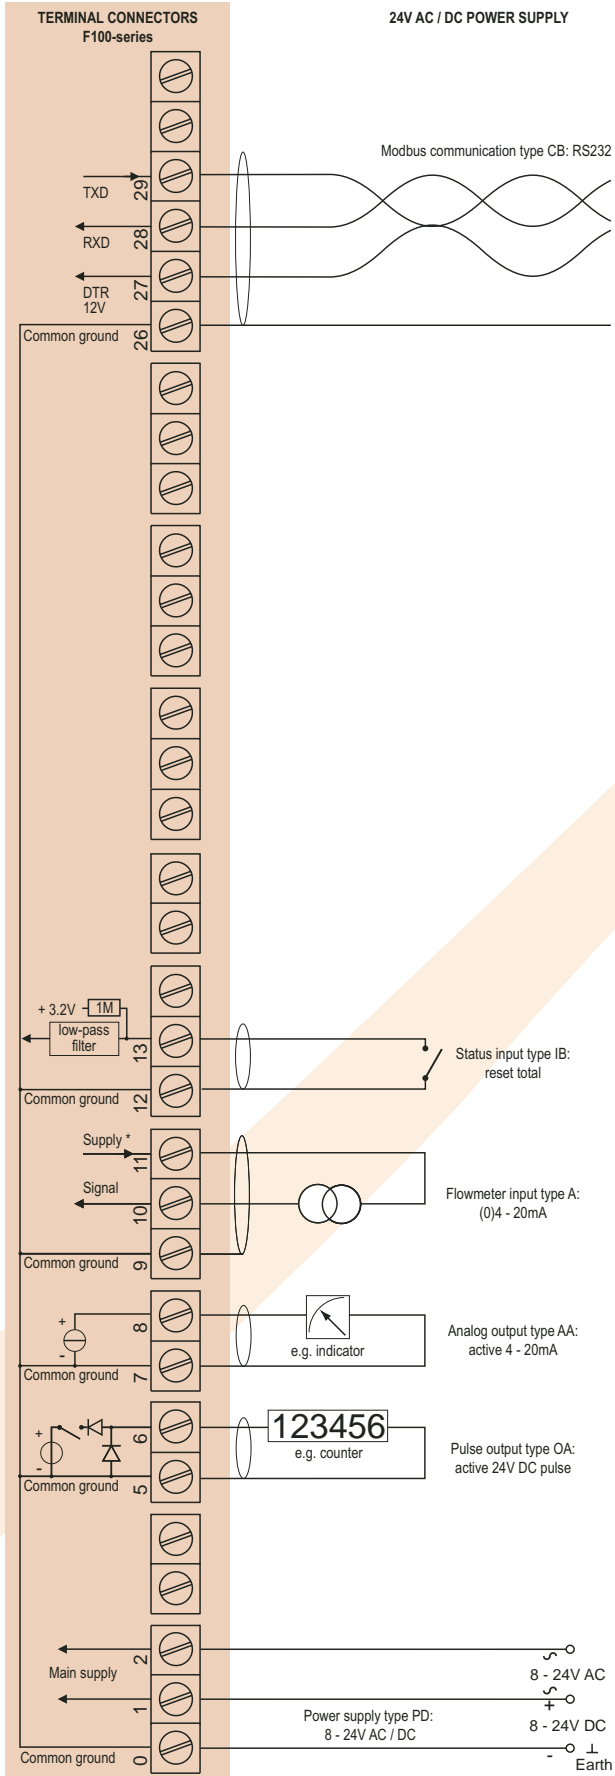

* Supply voltage: 3.2 - 8.2 - 12 - 24V DC to sensor

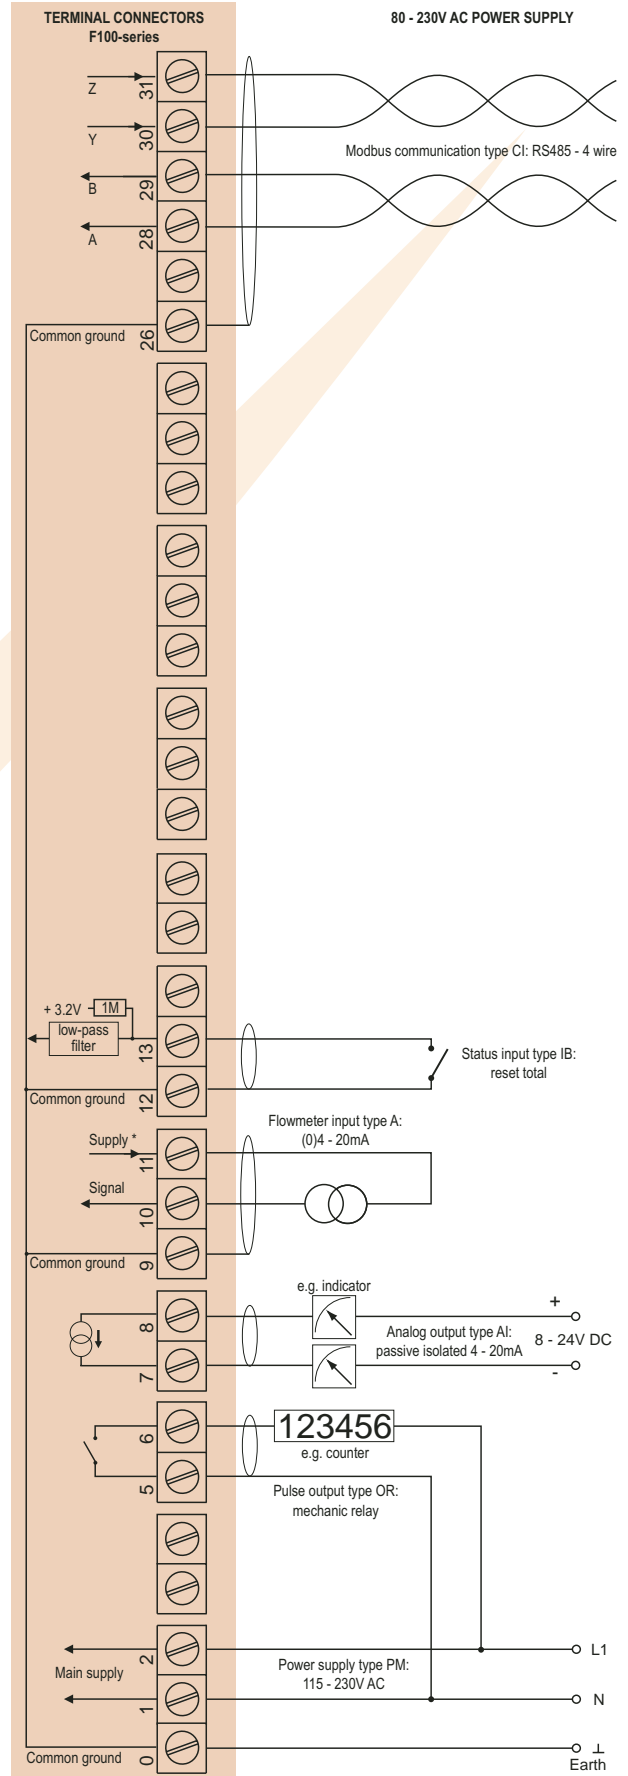

* Supply voltage: 3.2 - 8.2 - 12 - 24V DC to sensor

Hazardous area applications


The F112-XI has been ATEX approved by KEMA for use in intrinsically safe applications. It is approved according to $\text{Ex} \text{II} 1\text{GD EEx ia IIB/IIC T4 T100}^\circ\text{C}$ for gas and dust applications with an operational temperature range of -30°C to $+70^\circ\text{C}$ (-22°F to $+158^\circ\text{F}$). Besides the I.S. power supply for the pulse output, it is allowed to connect up to three I.S. power supplies in IIB applications or one in IIC applications. Full functionality of the F112 remains available, including 4 - 20mA output, pulse output and Modbus communication (type CT). Power supply type PD-XI offers a 8.2V sensor supply e.g. for one Namur sensor. A flame proof enclosure with rating $\text{Ex} \text{II} 2\text{G EEx d IIB T5}$ is available as well. Please contact your supplier for further details.

Certificate of conformity KEMA 03ATEX1074 X




Configuration example IIB and IIC

F112-P-(AP)-(CT)-IB-(OT)-PB-XI - battery powered unit

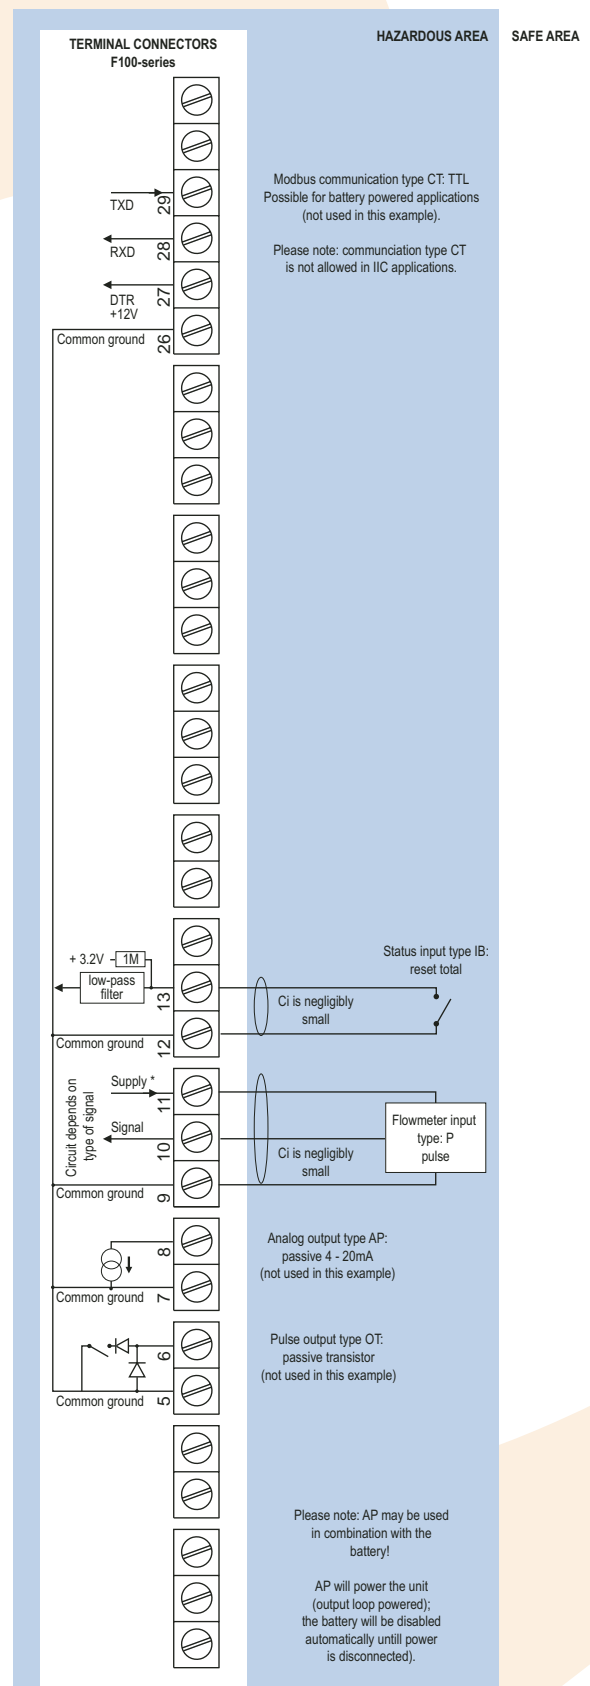


* Note sensor supply voltage: 1.2V DC for coil sensors or 3.2V DC for other pulse sensors.

Configuration example IIB and IIC - F112-P-AP-(CT)-IB-OT-XI - Output loop powered

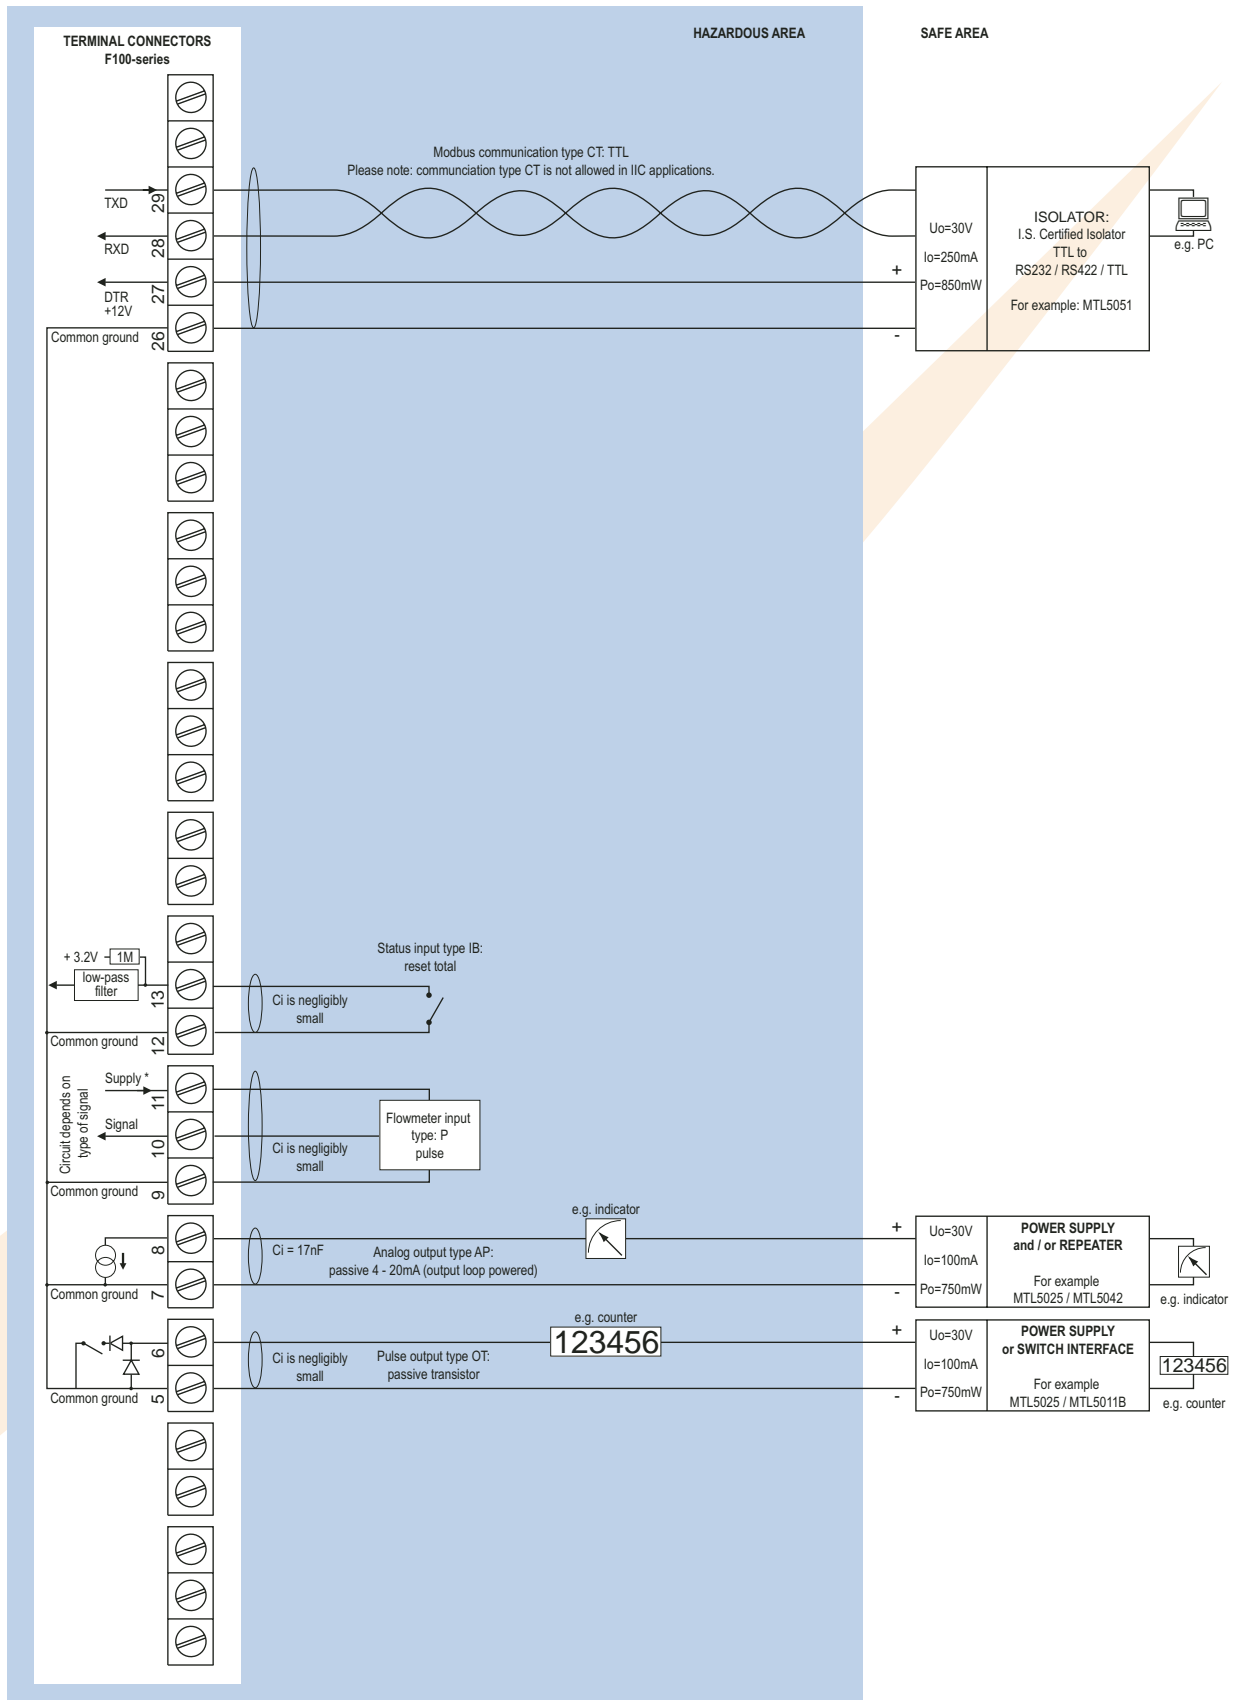

* Note sensor supply voltage: 1.2V DC for coil sensors or 3.2V DC for other pulse sensors.

Configuration example IIB - F110-A-AF-CT-IB-OT-(PB)-(PD)-XI - Power supply 16 - 30V DC or battery

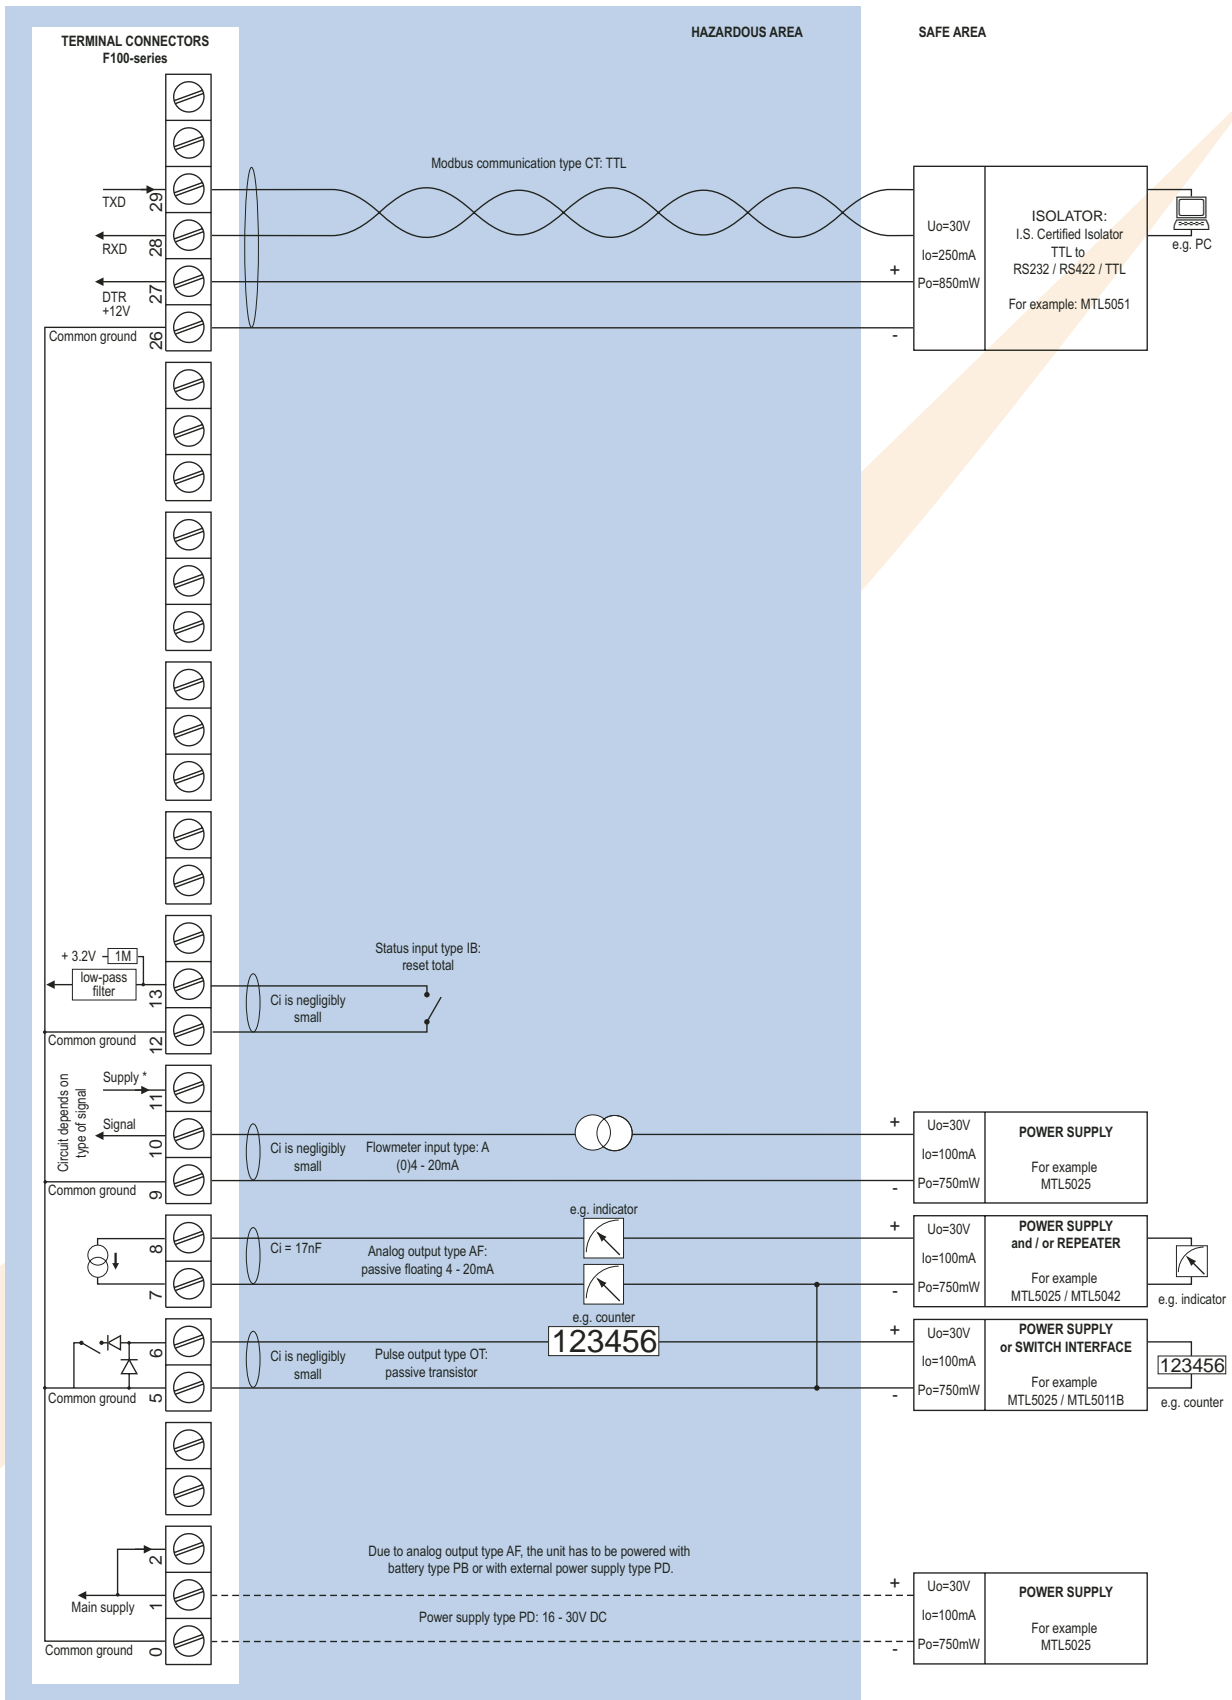

Technical specification

General

Display	
Type	High intensity reflective numeric and alphanumeric LCD, UV-resistant.
Dimensions	90 x 40mm (3.5" x 1.6").
Digits	Seven 17mm (0.67") and eleven 8mm (0.31") digits. Various symbols and measuring units.
Refresh rate	User definable: 8 times/sec. - 30 secs.
Option ZB	LED-backlight - available appr. Nov. 2004.

Casing	
Window	Polycarbonate window.
Sealing	EPDM and PE.
Control keys	Three industrial micro-switch keys. UV-resistant polyester keypad.
Type HA	Die-cast aluminum field mount enclosure IP67 / NEMA 4X with 2-component UV-resistant coating.
Dimensions	130 x 114 x 58mm (5.1" x 4.5" x 2.28") - W x H x D.
Cable Entry	2 x PG9 and 1 x M20 tapped hole in the centre.
Weight	950 gr.
Type HB	Die-cast aluminum panel mount enclosure IP65 / NEMA 4 with 2-component UV-resistant coating.
Dimensions	130 x 114 x 50mm (5.1" x 4.5" x 1.97") - W x H x D.
Panel cut-out	115 x 96mm (4.53" x 3.78") LxH.
Weight	525 gr.
Type HC	ABS panel mount enclosure IP65 / NEMA 4, UV-resistant and flame retardent.
Dimensions	130 x 114 x 48mm (5.1" x 4.5" x 1.89") - W x H x D.
Panel cut-out	115 x 96mm (4.53" x 3.78") LxH.
Weight	300 gr.
Type HD	ABS wall mount enclosure IP67 / NEMA 4X, UV-resistant and flame retardent.
Dimensions	130 x 114 x 71mm (5.1" x 4.5" x 2.8") - W x H x D.
Cable Entry	None, user defined.
Weight	400 gr.
Type HU	Die-cast aluminum field mount enclosure IP67 / NEMA 4X with 2-component UV-resistant coating.
Dimensions	5.1" x 4.5" x 2.28" - W x H x D.
Cable Entry	3 x 1/2" NPT tapped hole.
Weight	950 gr.



Operating temperature	
Operational	-30°C to +80°C (-22°F to +178°F).

Power requirements	
Type PB	Long life Lithium battery - life-time depends upon settings and configuration - up to 5 years.
Type PD	8 - 24V AC/DC ± 10%.
Type PD-XI	16 - 30V DC (Intrinsically Safe).
Type PF	24V AC/DC ± 10%.
Type PL	Input loop powered from sensor signal 4 - 20mA (type "A") - requires types AI or AF and OT.
Type PM	115 - 230V AC ± 10%.
Type PX	8 - 28V DC output loop powered unit with analog output signal type AP (or 8 - 24 V AC/DC if type AP will not be used).

Sensor excitation	
Type PB / PX	3.2V DC for pulse signals and 1.2V DC for coil pick-up.
Type PD	1.2 - 3.2 - 8.2 - 12 and 24V DC - max. 50mA@24V DC.
Type PD-XI	1.2 - 3.2 - 8.2V DC - max. 7mA@8.2V DC and mains power supply voltage (as connected to terminal 1).
Note	In case PD-XI and signal input type A or U, the sensor supply volage will be according to power supply as connected to terminal 1.
Type PF / PM	1.2 - 3.2 - 8.2 - 12 and 24V DC - max. 200mA@24V DC.

Terminal connections	
Type	Removable plug-in terminal strip. Wire max. 1.5mm ² and 2.5mm ² .

Data protection	
Type	EEPROM backup of all settings. Backup of running totals every minute. Data retention at least 10 years.
Pass-code	Configuration settings can be pass-code protected.

Hazardous area	
Intrinsically safe	ATEX approval ref:  II 1GD EEx ia IIB/IIC T4 T100°C.
Type XI	CSA/FM pending. Maximum ambient +70°C (158°F).
Explosion proof	ATEX approval ref:  II 2G EEx d IIB T5.
Type XD/XF	Dimensions of enclosure: 218 x 418 x 210mm (8.58" x 16.45" x 8.38") L x H x D.
Weight	16 Kg.

Environment	
Electromagnetic compatibility	Compliant ref: EN 61326 (1997), EN 61010-1 (1993).

Signal inputs	
Flowmeter	
Type P	Coil / sine wave (minimum 20mVpp or 80mVpp - sensitivity selectable), NPN/PNP, open collector, reed-switch, Namur, active pulse signals 8 - 12 and 24V DC.
Frequency	Minimum 0Hz - maximum 7kHz for total and flowrate. Maximum frequency depends on signal type and internal low-pass filter. E.g. reed switch with low-pass filter: max. frequency 120Hz.
K-Factor	0.000010 - 9,999,999 with variable decimal position.
Low-pass filter	Available for all pulse signals.
Option ZF	coil sensitivity 10mVpp.
Type A	(0)4 - 20mA. Analog input signal can be scaled to any desired range within 0 - 20mA.
Type U	0 - 10V DC. Analog input signal can be scaled to any desired range within 0 - 10V DC.
Accuracy	14 bit. Error < 0.05%. Low level cut-off programmable.
Span	0.000010 - 9,999,999 with variable decimal position.
Update time	Four times per second.
Voltage drop	Type A: 2.5V@20mA.
Load impedance	Type U: 3kΩ.
Relationship	Linear and square root calculation.
Note	For signal type A and U: external power to sensor is required; e.g. type PD.

Logic inputs	
Function	Terminal input to reset total remotely.
Type IB	Internally pulled-up switch contact - NPN.
Duration	Minimum pulse duration 100msec.

Signal outputs

Analog output

Function	Transmitting linearised flowrate.
Accuracy	10 bit. Error < 0.05%. Analog output signal can be scaled to any desired range.
Update time	Ten times per second.
Type AA	Active 4 - 20mA output (requires OA + PD, PF or PM).
Type AB	Active 0 - 20mA output (requires OA + PD, PF or PM).
Type AF	Passive floating 4 - 20mA output for Intrinsically Safe applications (requires PB, PL or PD).
Type AI	Passive galvanically isolated 4 - 20mA output - also available for battery powered models (requires PB, PD, PF, PL or PM).
Type AP	passive 4 - 20mA output - not isolated. Unit will be loop powered.
Type AU	Active 0 - 10V DC output (requires OA + PD, PF or PM).

Pulse output

Function	Pulse output - transmitting accumulated total.
Type OA	One active 24V DC transistor output (PNP); max. 50mA per output (requires AA + PD, PF or PM).
Type OR	One electro-mechanical relay output - isolated; max. switch power 230V AC (N.O.) - 0.5A per relay (requires PF or PM).
Type OT	One passive transistor output (NPN) - not isolated.
Load	Max. 50V DC - 300mA per output.
Pulse output	Max. frequency 64Hz. Pulse length user definable between 7.8 msec up to 2 seconds.

Communication option

Function	Reading display information, reading / writing all configuration settings.
Type CB	RS232
Type CH	RS485 2-wire
Type CI	RS485 4-wire
Type CT	TTL Intrinsically Safe.
Protocol	Modbus RTU.
Speed	1200 - 2400 - 4800 - 9600 baud.
Addressing	Maximum 255 addresses.

Operational

Operator functions

Displayed Functions	<ul style="list-style-type: none"> Linearised flowrate and / or total. Linearised total and accumulated total. Total can be reset to zero by pressing the CLEAR-key twice.
---------------------	---

Total

Digits	7 digits.
Units	L, m3, GAL, USGAL, KG, lb, bbl, no unit.
Decimals	0 - 1 - 2 or 3.
Note	Total can be reset to zero.

Accumulated total

Digits	11 digits.
Units / decimals	According to selection for total.
Note	Can not be reset to zero.

Flowrate

Digits	7 digits.
Units	mL, L, m3, Gallons, KG, Ton, lb, bl, cf, RND, ft3, scf, Nm3, NI, ical - no units.
Decimals	0 - 1 - 2 or 3.
Time units	/sec - /min - /hr - /day.

Display example - 90 x 40mm (3.5" x 1.6")



Ordering information

Example (standard configuration)

F112-P-AP-CX-HC-OT-PX-XX-ZX.

Explanation standard configuration:

P: flowmeter signal: pulse; AP: passive 4 - 20mA analog output; CX: no communication; HC: ABS panel mount enclosure; OT: passive transistor output; PX: the unit is powered by the analog output loop, type AP: 8 - 28V DC (or AC); XX: Safe area; ZX: no options.

Ordering information:	F112	-	-A	-C	-H	-I	-O	-P	-X	-Z
Flowmeter input signal										
A	⊗									
(0)4 - 20mA input.										
P	⊗									
Pulse input: coil, npn, pnp, namur, reed-switch.										
U	⊗									
0 - 10V DC input.										
Analog output signal										
AA										
Active 4 - 20mA output - requires OA + PD, PF or PM.										
AB										
Active 0 - 20mA output - requires OA + PD, PF or PM.										
AF	⊗									
I.S. floating 4 - 20mA output - requires PB, PL or PD.										
AI										
Isolated 4 - 20mA output - requires PB, PD, PF, PL or PM.										
AP	⊗									
Passive 4 - 20mA output, loop powered unit.										
AU										
Active 0 - 10V DC output - requires OA + PD, PF or PM.										
Communication										
CB										
Communication RS232 - Modbus RTU.										
CH										
Communication RS485 - 2-wire - Modbus RTU.										
CI										
Communication RS485 - 4-wire - Modbus RTU.										
CT	⊗									
Intrinsically Safe TTL - Modbus RTU.										
CX	⊗									
No communication.										
Enclosure										
HA	⊗									
Aluminum field mount enclosure IP67 / NEMA 4X.										
HB	⊗									
Aluminum panel mount enclosure IP65 / NEMA 4.										
HC	⊗									
ABS panel mount enclosure IP65 / NEMA 4.										
HD	⊗									
ABS wall mount enclosure IP67 / NEMA 4X.										
HU	⊗									
Aluminum field mount enclosure IP67 / NEMA 4X.										
Inputs										
IB	⊗									
Terminal input to reset total.										
Outputs										
OA										
One active transistor output - requires AA, AB or AU and PD, PF or PM.										
OR										
One mechanic relay output - requires PF or PM.										
OT	⊗									
One passive transistor output - standard configuration.										
Power supply										
PB	⊗									
Lithium battery powered.										
PD	⊗									
8 - 24V AC/DC + sensor supply - with XI: 16 - 30V DC.										
PF										
24V AC/DC + sensor supply.										
PL	⊗									
Input loop powered from sensor signal type "A" - requires AI or AF and OT.										
PM										
115 - 230V AC + sensor supply.										
PX	⊗									
No power supply option. Unit requires external loop AP.										
Hazardous area										
XI	⊗									
Intrinsically safe.										
XD	⊗									
EExd enclosure - 1 key.										
XF	⊗									
EExd enclosure - 3 keys.										
XX										
Safe area only.										
Other options										
ZB	⊗									
Backlight (available appr. Nov. 2004).										
ZF	⊗									
Coil input 10mVpp.										
ZX	⊗									
No options.										

The bold marked text contains the standard configuration.

⊗ Available Intrinsically Safe.

Specifications are subject to change without notice.

FLUIDWELL bv
P.O. Box 6
5460 AA - Veghel - The Netherlands
Tel.: +31 (0)413 343786
Fax.: +31 (0)413 363443
sales@fluidwell.com
Internet: www.fluidwell.com

