

## High Temperature/Pressure Alumina Insulated Probe Model 738A

### GENERAL DESCRIPTION

This special purpose, alumina insulated probe was designed for use with Robertshaw's capacitance level and bulk measuring instruments and is offered for use in special, corrosive material measurement applications involving high temperature and pressure conditions. The capacitance sensing probe is made up primarily of a pressure tight Lava seal, a 3/4" entrance gland and a stainless steel coil spring conductor surrounded by a ceramic insulator of alumina having a normal outside diameter of 3/8" with an inside diameter of 1/4".

High purity alumina is used to give the probe high compressive strength, improved resistance to chemical attack and in general allows for installation in many high temperature operations where standard, Teflon covered probes could not withstand the conditions.

### APPLICATION

The alumina probe is intended for use in high temperature-high pressure applications where the product being measured is either conducting or nonconducting liquids. It can also be used in granular materials however, providing they are not excessively abrasive or have high densities which would subject the probe to extreme side forces.

The alumina probe should not be subjected to high side loads, high amplitude-low frequency vibrations or high thermal shock.

The high compressive strength of the cast alumina makes this a suitable non-porous insulator capable of withstanding very high pressures in the compressive mode. The crushed lava seal (magnesium silicate) provides a tight seal against leakage under pressure conditions and yet is resilient enough to withstand high temperature conditions; therefore, this probe can be used reliably in many applications.



- **Special Electrode Design**  
Provides improved linearity and reduced gain in high pressure dielectric applications.
- **Magnesium Silicate Seal**  
Provides a tight seal against leakage under high pressure conditions.
- **Alumina Insulation** Non-porous, capable of withstanding the chemical attack of many corrosive materials.
- **High Temperature**  
High purity alumina permits operating temperatures as high as 1000°F


**SPECIFICATIONS**

- Minimum Length* .....6 inches
- Maximum Length* .....36" (in 6" increments)
- Probe Gland* ..... 3/4" NPT, 316 St. St.
- Probe Insulation* ..... High purity alumina
- Probe Diameter* ..... 3/8" O.D.
- Temperature/Pressure/Rating* ..... 3000 psi @ 300°F  
 2000 psi @ 500°F  
 1000 psi@ 1000°F

**NOTE: DO NOT USE FOR VACUUM SERVICE**

- Probe Gain* ..... 60 pf per foot
- Gland Capacitance* ..... 29 pf

**ORDERING INFORMATION**

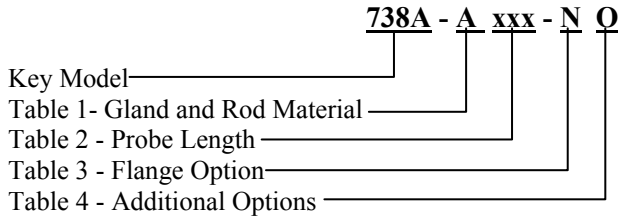

**KEY MODEL NUMBER**

Model No.	Description
738A	High pressure/temperature alumina ceramic insulated rigid probe. Designed for use in temperatures up to 1000°F and pressure up to 3000 psi. <b>NOTE: Maximum pressure at 1000°F is 1000 psi.</b>

**Table 1- GLAND AND SENSOR MATERIAL**

Desig.	Description
A	316 St. St. gland with 3/8" OD ceramic insulation.

**Table 2 - PROBE ACTIVE LENGTH**

Desig.	Description
xxx	Specify active length in inches. NOTE: Only available in 6" increments. Maximum length is 36".

**Table 3 - FLANGE OPTION**

Desig.	Description
N	None
A	Flange screwed onto probe gland. See PL-FL

**Table 4 - ADDITIONAL OPTIONS**

Desig.	Description
O	None



**U.S.A. and CANADA**

Robertshaw Industrial Products Division  
 1602 Mustang Drive  
 Maryville, TN 37801  
 Phone: (865) 981-3100 Fax: (865) 981-3168  
<http://www.robertshawindustrial.com>

**Exports**

Invensys Appliance Controls  
 2809 Emerywood Parkway  
 P.O. Box 26544  
 Richmond, Virginia 23261-6544  
 Phone: (804) 756-6500 Fax: (804) 756-6561



Q-3904 (5/01)