

Robertshaw

INDUSTRIAL PRODUCTS DIVISION

GENERAL DESCRIPTION

The Robertshaw Model 314B Level-Tek is an all solid state RF control instrument providing ON/OFF control with two independently adjustable setpoints each with its own output control relay. For use with a vertically mounted probe assembly, the independent and non-interacting control points may be adjusted throughout the length of the probe up to the limits of the capacitance range.

This true "duplex" or dual Level-Tek provides application versatility with cost and space savings not previously obtainable. Available by order in fail-safe control modes for "High" and "Low", "High" and "High-High", or "Low" and "Low-Low". The operational mode may be changed in the field by soldered jumper connections on the chassis assembly.

The Model 314B has two independent set-points, each with adjustable differential. The Set-point and Differential adjustments are by means of nominal 20 turn sealed potentiometers with light-emitting diodes on the chassis assembly to indicate relay operation as an aid in calibration.

The aluminum die-cast enclosure for the Model 314B is suitable for use in hazardous areas classified Class I Division 1, Groups C & D as well as NEMA 4 watertight.

PRINCIPLES OF OPERATION

The Model 314B is an all solid state instrument utilizing the latest concepts in semiconductor technology including integrated circuit differential amplifiers for increased reliability. This circuit design incorporates a patented principle for stable, anti-coating operation. Resistive values from product buildup must be ignored, otherwise errors in measurement will occur. This design permits the instrument to reliably "read through" conductive coatings and see the true, actual level.

The sensing probe capacitance is directly proportional to the process variable which is the signal desired. This "true" capacitance value is "charged" through a fixed resistor from a regulated DC Voltage source within the instrument. When the charged value reaches a pre-determined voltage level, it is instantaneously discharged and the cycle is repeated. This charging rate is compared to the charge rate of fixed reference capacitors, each fixed charge rate being adjustable by means of

Duplex Level-Tek Model 314B



Probe shown for illustration only. Must be ordered separately.

the individual set-point adjustment potentiometers. When the probe charging rate is equal to either of the fixed reference capacitor charging rates, integrated circuit amplifiers cause the appropriate control relay to de-energize.

This unique circuit requires no oscillator transformers or variable capacitors and results in continuous adjustment capability of the set-point by the use of potentiometers.

FEATURES AND BENEFITS

- **Patented Anti-Coating Principle**
Minimizes error due to material build-up on probe.
- **Two independent set-points and control relays**
Space and cost savings.
- **Wide Range Adjustability**
Operates over larger level spans.
- **Adjustable Differential on each set-point**
Greater versatility of applications.
- **Single unit system mounts directly on the probe**
Lower purchasing and installation costs.
- **Field selectable fail-safe modes of operation**
Simple soldered jumper links.

SPECIFICATIONS

ENVIRONMENTAL DATA


Enclosure: Explosion proof, suitable for Class I, Div. 1, Groups C & D; Class II, Div. 1, groups E, F, G hazardous locations and NEMA 4.

Operating Temperature Limits -40°F to +160°F
Storage Temperature Limits -55°F to +225°F
Vibration Limits 2 g's to 100 Hz
Enclosure Classification Class 1, Division 1, Groups C and D and Watertight NEMA 4
Operating Humidity Range 0% to 90% RH
Temperature Coefficient 0.0065 pf/°F


ELECTRICAL DATA

Supply Voltage 26.5 VDC \pm 10%,
 120 VAC \pm 10% or 240 VAC \pm 10%
Supply Power 5 VA Maximum
Output Relay:
Form SPDT (Electro-Mech Relays)
Rating 5A, 120 VAC or 28 VDC
Set-Point Adjustment Range 15-500 pf
Differential (Deadband) 3 pf to 250 pf
Response Time 50 milliseconds

DIMENSIONAL DATA

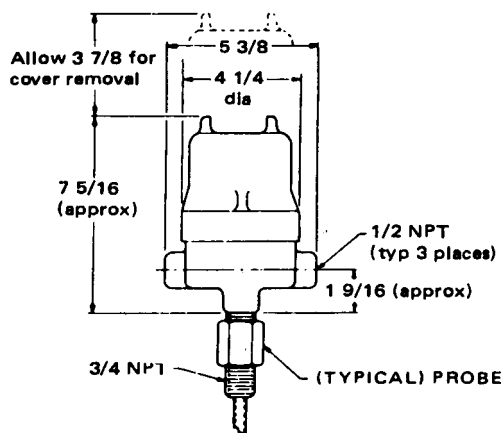

ORDERING INFORMATION

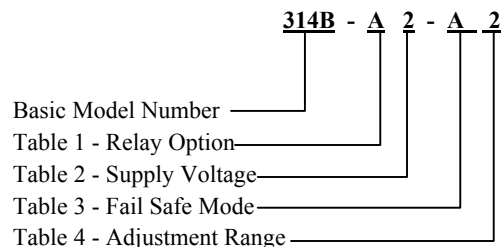

BASIC MODEL

Model No.	Description
314B	Duplex Level-Tek Control Instrument

TABLE I - RELAY OPTION

Designation	Description
A	Two SPDT Relays

TABLE 2 - SUPPLY VOLTAGE

Designation	Description
1	26.5 VDC \pm 10%
2	120 VAC \pm 10%, 50/60 Hz
3	240 VAC \pm 10%, 50/60 Hz

TABLE 3 - FAIL SAFE MODE

Designation	Description
A	High and Low
B	Low and Low-Low
C	High and High-High

TABLE 4 - ADJUSTMENT RANGE

Designation	Description
2	Adjustable range 15 to 500 pf

Robertshaw

U.S.A. and CANADA

Robertshaw Industrial Products Division

1602 Mustang Drive

Maryville, TN 37801

Phone: (865) 981-3100 Fax: (865) 981-3168

<http://www.robertshawindustrial.com>

Exports

Invensys Appliance Controls

2809 Emerywood Parkway

P.O. Box 26544

Richmond, Virginia 23261-6544

Phone: (804) 756-6500 Fax: (804) 756-6561