

## Conductivity Switch Model 352

### GENERAL DESCRIPTION

The Model 352 is a conductivity sensing ON-OFF control unit that is completely self-contained and enclosed in a weathertight and explosion proof housing. Designed to be mounted directly on the sensing probe or electrode, it may be used to detect conductive liquid levels or interface between non-conductive and conductive liquids.


The plug-in chassis assembly within the enclosure is equipped with a 20 turn potentiometer for threshold resistance adjustment and provides excellent resolution over a resistance range from 200 ohms to 2 megohms. The output control relay is socket mounted in DPDT configuration.

The sensing electrode voltage is transformer isolated from the supply voltage and is stepped down to approximately 10 VAC assuring personnel safety and freedom from electrode polarization. Incorporated within the unit are soldered jumper connections that may be changed in the field to allow low-level or high-level fail safe operation in the event of supply power failure.

Sensing electrodes, or probes are available in a variety of lengths and materials to suit the particular application. **The sensing electrode, or probe, must be of the bare, non-insulated style.**

### PRINCIPAL OF OPERATION

The Model 352 conductivity switch utilizes an AC resistance bridge circuit, one leg of which is formed by the sensing probe in contact with the liquid and the opposite leg of the bridge containing the threshold adjustment potentiometer. AC output from the bridge is phase discriminated and coupled to an integrated circuit differential amplifier. Output from the amplifier is connected to a relay driver stage which in turn operates the control relay. Positive feedback is incorporated which assures solid bi-stable relay switching to prolong relay contact life.

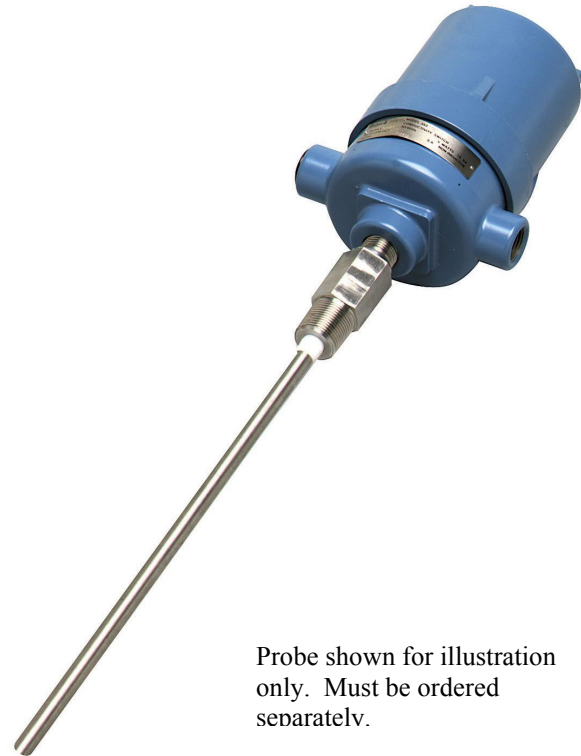

Probe shown for illustration only. Must be ordered separately.

### FEATURES AND BENEFITS

- **Low AC voltage on electrode -**  
No safety hazard to personnel
- **Field changeable fail-safe mode -**  
Operation on low level or high level application
- **Completely self-contained**  
Mounts directly on sensing probe, no additional equipment required
- **Wide adjustment range -**  
Allows operation on even partially conductive materials
- **Plug-in Control Relay**  
Ease of maintenance.

**SPECIFICATIONS**


**ELECTRICAL**

**Supply voltage** ..... 120 VAC ±10%, 50/60 Hz  
 240 VAC ± 10%, 50/60 Hz  
**Supply power** ..... 5 watts, 15 VA maximum  
**Control Relay:**  
 Form ..... DPDT, electromechanical  
 Rating ..... 5 a @ 120/240 VAC, electromechanical


**ENVIRONMENTAL**

**Enclosure** ..... Weathertight NEMA 4 and Explosion Proof  
 Class 1, Division 1, Group C & D  
**Operating temperature limits** ..... -40°F to +160°F  
**Vibration limits** ..... ±2 g's, 20-200 Hz  
**Humidity** ..... 0-95 RH@ 100°F  
**Shock** ..... 75 g's for 11 ms without permanent damage  
**PERFORMANCE**  
**Resistance operating range** ..... 200 ohms to 2.0 megohms  
**Deadband** ..... 5% maximum  
**Temperature coefficient** ..... 0.05%/100°F  
**Supply coefficient** ..... 2%/10% supply change

**ELECTRICAL CONNECTIONS**

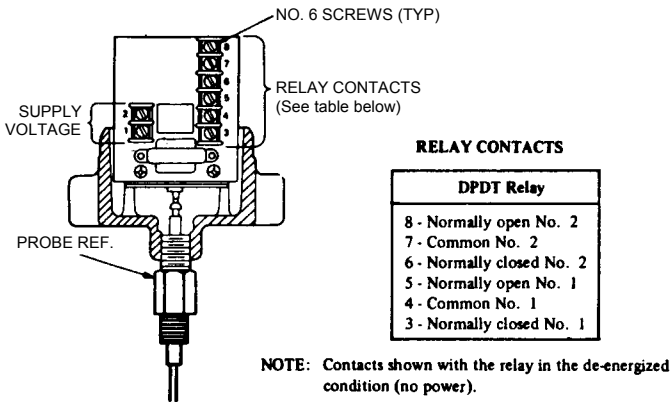


**DIMENSION DATA**

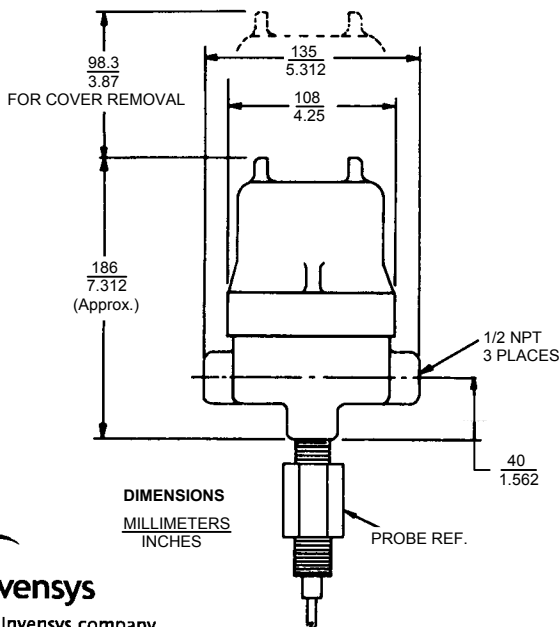

**ORDERING INFORMATION**

**STANDARD MODEL\*** 352 - A 2  
**OPTIONAL MODELS**  
 Select from tables below.  
 (Allow additional 2 weeks delivery.)

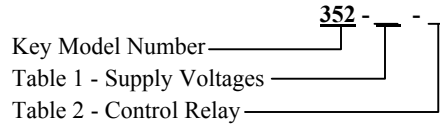

**KEY MODEL NUMBER**

Designation	Description
352	Conductivity sensing ON-OFF Control Instrument. Completely self-contained including plug-in control relay and threshold resistance adjustment. <b>Mounts directly on bare (non-insulated) sensing probe or electrode.</b> Does not include probe.

**TABLE 1 - SUPPLY VOLTAGE**

Designation	Description
*A	120 VAC ± 10%, 50/60 Hz
B	240 VAC ± 10%, 50/60 Hz

**TABLE 2 - CONTROL RELAY**

Designation	Description
*2	DPDT electromechanical relay

**Robertshaw**

**U.S.A. and CANADA**  
 Robertshaw Industrial Products Division  
 1602 Mustang Drive  
 Maryville, TN 37801  
 Phone: (865) 981-3100 Fax: (865) 981-3168  
<http://www.robertshawindustrial.com>

**Exports**

Invensys Appliance Controls  
 2809 Emerywood Parkway  
 P.O. Box 26544  
 Richmond, Virginia 23261-6544  
 Phone: (804) 756-6500 Fax: (804) 756-6561

Q-4075 (7/01)